

netis®

Easy Network, Trustable

150Mbps Wireless N Router

WF2411R



Features:

- >Wireless N speed up to 150Mbps
- >Supports Dual Access as Internet Connection: Russia PPPoE, Russia PPTP, Russia L2TP
- >Multi-wireless modes to expand the wireless network: AP, WDS, AP+WDS, Client, Repeater
- >Easy wireless security encryption with single WPS button
- >5dBi high gain antenna provides better wireless signal coverage and reception
- >Quick setup, with built-in management page

Brief:

The netis WF2411R 150Mbps Wireless N Router is a combined wired and wireless device for SOHO network applications. It's compatible with 802.11b/g/n devices and provides the wireless transfer speed up to 150Mbps, offering a better performance on web surfing, emailing, and file sharing. WF2411R can work with multiple Internet connection types including Dual Access to fully support many ISP 's in Russia, Ukraine, Israel and other countries. It also supports multi-wireless modes including AP, WDS, AP+WDS, Repeater, Client, to expand your wireless network easily. With the Quick Setup web-page and WPS button, it can help you to build your wireless network in a snap.

Specification:


Wireless	
Standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Signal Rate	Up to 150Mbps
Frequency Range	2.4-2.4835GHz
Transmit Power	20dBm(MAX)
Data Transfer Rate	802.11n: 40MHz(150Mbps, 135Mbps, 120Mbps, 90Mbps, 60Mbps, 45Mbps, 30Mbps, 15Mbps) 20MHz(72Mbps, 65Mbps, 57Mbps, 43Mbps, 28Mbps, 21Mbps, 14Mbps, 7Mbps) 802.11g:(54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b:(11Mbps, 9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Mode	AP, WDS, AP+WDS, Repeater, Client, Multiple AP
Wireless Security	64/128-bit WEP WPA-PSK/WPA2-PSK(TKIP/AES) SSID Broadcast Enable/Disable Wireless MAC Filtering

Hardware	
Standard	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX
Interface	1 * 10/100M Auto MDI/MDIX RJ45 WAN port 4 * 10/100M Auto MDI/MDIX RJ45 LAN port
LED	SYS,WPS, WAN, LAN1-LAN4
Button	Default, WPS
Antenna	1 * external 5dBi antenna
Power Supply	DC 9V/500mA(Output)
Dimensions(L x W x H)	133 x 99 x 27 mm
Weight	149g

Software	
WAN Type	DHCP, Static IP, PPPoE, PPTP, L2TP, Dual Access(PPPoE/PPTP/L2TP), WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/MAC/Domain filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade, Backup & Restore

Others	
Environment	Operating Temperature: 0°C~40°C Operating Humidity: 10%~90% non-condensing Storage Temperature: -40°C~70°C Storage Humidity: 5%~90% non-condensing
Package	1 * WF2411R 1 * 9V/500mAPower Adapter 1 * Ethernet Cable 1 * Quick installation Guide

Topological Graph:

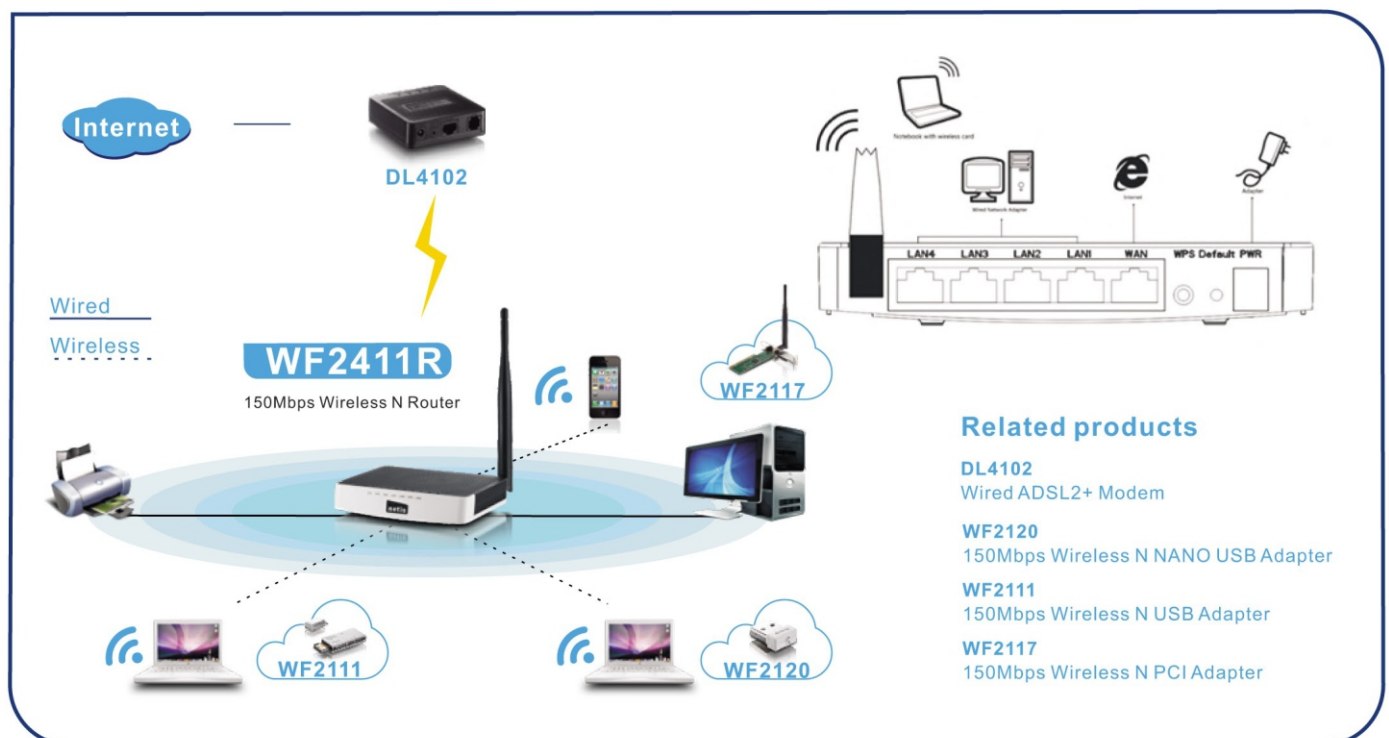

Related products

- DL4102**
Wired ADSL2+ Modem
- WF2120**
150Mbps Wireless N NANO USB Adapter
- WF2111**
150Mbps Wireless N USB Adapter
- WF2117**
150Mbps Wireless N PCI Adapter