

# USER MANUAL

WBR-2310

VERSION 2.2



---

# Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

## Manual Revisions

Revision	Date	Description
2.0	April 21, 2008	WBR-2310 Revision B1 with firmware version 2.00
2.1	June 6, 2008	Updated screenshots and minor fixes
2.2	February 23, 2009	Updated for firmware 2.03

## Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Copyright © 2009 by D-Link Systems, Inc.

All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Systems, Inc.

---


# Table of Contents

<b>Preface</b> .....	<b>i</b>	Big Pond.....	23
Manual Revisions .....	i	Static (assigned by ISP) .....	24
Trademarks.....	i	Wireless Settings .....	25
Package Contents.....	1	Manual Wireless Settings .....	26
System Requirements .....	2	Network Settings.....	27
Introduction.....	3	DHCP Server Settings .....	28
Features.....	4	DHCP Reservation .....	29
Hardware Overview .....	5	Virtual Server .....	30
Connections.....	5	Port Forwarding .....	32
LEDs .....	6	Application Rules .....	33
<b>Installation</b> .....	<b>7</b>	Network Filters.....	34
Before you Begin .....	7	Website Filters .....	35
Wireless Installation Considerations.....	8	Firewall Settings.....	36
Connect to Cable/DSL/Satellite Modem .....	9	DMZ Host .....	36
Connect to Another Router .....	10	VPN Passthrough.....	36
Getting Started .....	12	Advanced Wireless Settings .....	37
<b>Configuration</b> .....	<b>13</b>	Tx Rate.....	37
Web-based Configuration Utility .....	13	Preamble .....	37
Internet Connection .....	14	WMM Mode.....	37
Internet Connection Setup Wizard.....	15	Advanced Network Settings.....	38
Internet Setup .....	19	Administrator Settings.....	39
Dynamic (Cable).....	19	Time Settings.....	40
PPPoE (DSL) .....	20	System Settings.....	41
PPTP .....	21	Update Firmware .....	42
L2TP .....	22	DDNS.....	43
		System Test .....	44

Schedules .....	45	<b>Networking Basics .....</b>	<b>76</b>
Log Settings .....	46	Check your IP address .....	76
Device Information .....	47	Statically Assign an IP address .....	77
Log .....	48	<b>Technical Specifications .....</b>	<b>78</b>
Stats .....	49	<b>Contacting Technical Support .....</b>	<b>80</b>
Wireless .....	49	<b>Warranty .....</b>	<b>81</b>
Support .....	50	<b>Registration .....</b>	<b>86</b>
<b>Wireless Security .....</b>	<b>51</b>		
What is WEP? .....	51		
What is WPA? .....	52		
Configure WEP .....	53		
Configure WPA/WPA2 Personal .....	54		
Configure WPA/WPA2 Enterprise .....	55		
<b>Connect to a Wireless Network .....</b>	<b>56</b>		
Using Windows Vista® .....	56		
Configure Wireless Security .....	57		
Using Windows® XP .....	59		
Configure WEP .....	60		
Configure WPA/WPA2 .....	62		
<b>Troubleshooting .....</b>	<b>64</b>		
<b>Frequently Asked Questions .....</b>	<b>68</b>		
<b>Wireless Basics .....</b>	<b>71</b>		
What is Wireless? .....	72		
Tips .....	74		
Wireless Modes .....	75		



# Package Contents

<p><b>D-Link WBR-2310 RangeBooster G™ Router</b></p>	
<p><b>Power Adapter</b></p>	
<p><b>Ethernet Cable</b></p>	
<p><b>CD-ROM</b></p>	

**Note:** Using a power supply with a different voltage rating than the one included with the WBR-2310 will cause damage and void the warranty for this product.

# System Requirements

<b>Network Requirements</b>	<ul style="list-style-type: none"><li>• An Ethernet-based Cable or DSL modem</li><li>• IEEE 802.11g wireless clients</li><li>• 10/100 Ethernet</li></ul>
<b>Web-based Configuration Utility Requirements</b>	<p><b>Computer with the following:</b></p> <ul style="list-style-type: none"><li>• Windows®, Macintosh®, or Linux-based operating system</li><li>• An installed Ethernet adapter</li></ul> <p><b>Browser Requirements:</b></p> <ul style="list-style-type: none"><li>• Internet Explorer 6.0 or higher</li><li>• Mozilla 1.7.12 or higher</li><li>• Firefox 2.0 or higher</li><li>• Safari 1.0 or higher (with Java 1.3.1 or higher)</li><li>• Chrome 1.0 or higher</li><li>• Opera 6.0 or higher</li></ul> <p><b>Windows® Users:</b> Make sure you have the latest version of Java installed. Visit <a href="http://www.java.com">www.java.com</a> to download the latest version.</p>
<b>CD Installation Wizard Requirements</b>	<p><b>Computer with the following:</b></p> <ul style="list-style-type: none"><li>• Windows® XP with Service Pack 2 or Vista</li><li>• An installed Ethernet adapter</li><li>• CD-ROM drive</li></ul>

# Introduction

## **ENHANCED WIRELESS PERFORMANCE**

Create a fast and secure wireless network for your home using the D-Link RangeBooster G™ Wireless Router (WBR-2310). Share your high-speed Internet connection with multiple users and start sharing files, music, and photos.

## **RANGEBOOSTER G™ TECHNOLOGY**

Built with RangeBooster G™ Technology, this Wireless Router delivers faster wireless signal rates and farther wireless coverage than most other 802.11g devices. Having a faster connection allows you more time to enjoy listening to music and watching videos rather than spending time waiting for the files to finish transferring. With farther wireless coverage, you can connect to the network from greater distances.

## **TOTAL NETWORK SECURITY**

The RangeBooster G™ Router's active firewall offers total network protection from unauthorized access by online intruders and malicious attacks using Stateful Packet Inspection (SPI) technology. Network management features like MAC address filtering prevents unauthorized access, while parental control features prevent family members from viewing inappropriate content. The RangeBooster G™ Router also supports WEP and WPA encryption.

## **EASY TO INSTALL AND USE**

With D-Link's Quick Router Setup Wizard, you can set up your wireless network in minutes. It also configures your Internet Service Provider (ISP) settings to quickly establish broadband Internet connectivity. The Wizard even makes it easy to add new wireless devices onto the network. This Wireless Router is backward compatible with 802.11b standard, ensuring compatibility with a wide range of popular wireless devices.

Offering enhanced wireless performance and total network protection, the D-Link RangeBooster G™ Wireless Router (WBR-2310) is the ideal choice for creating a fast and secure wireless home network.

## **WHAT THIS PRODUCT DOES**

Share your High-Speed Internet connection with multiple computers in your home by simply connecting the D-Link RangeBooster G™ Router to your cable or DSL modem. Once connected, you can create a faster and completely secure personal wireless network to share files, music, and photos.

## **NETWORK SECURITY SOLUTION**

Protect your family and personal information with D-Link's RangeBooster G™ Active Firewall technology. Using the latest in SPI technology, this firewall provides double-security while scanning Internet traffic to protect your network from unauthorized access by online intruders. The D-Link RangeBooster G™ router makes it easy to set up a safe and secure wireless network using our Quick Router Setup Wizard.


# Features

- **Faster Wireless Networking** - The WBR-2310 provides up to 108Mbps\* wireless connection with other 802.11g wireless clients. This capability allows users to participate in real-time activities online, such as video streaming, online gaming, and real-time audio. The performance of this 802.11g wireless router gives you the freedom of wireless networking at speeds 15x faster than 802.11b.
- **Compatible with 802.11b and 802.11g Devices** - The WBR-2310 is still fully compatible with the IEEE 802.11b standard, so it can connect with existing 802.11b PCI, USB and Cardbus adapters.
- **Advanced Firewall Features** - The Web-based user interface displays a number of advanced network management features including:
  - **Content Filtering** - Easily applied content filtering based on MAC Address, URL, and/or Domain Name.
  - **Filter Scheduling** - These filters can be scheduled to be active on certain days or for a duration of hours or minutes.
  - **Secure Multiple/Concurrent Sessions** - The WBR-2310 can pass through VPN sessions. It supports multiple and concurrent IPSec and PPTP sessions, so users behind the WBR-2310 can securely access corporate networks.
- **User-friendly Setup Wizard** - Through its easy-to-use Web-based user interface, the WBR-2310 lets you control what information is accessible to those on the wireless network, whether from the Internet or from your company's server. Configure your router to your specific settings within minutes.

\* Maximum wireless signal rate derived from IEEE Standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental conditions will adversely affect wireless signal range.


# Hardware Overview

## Connections

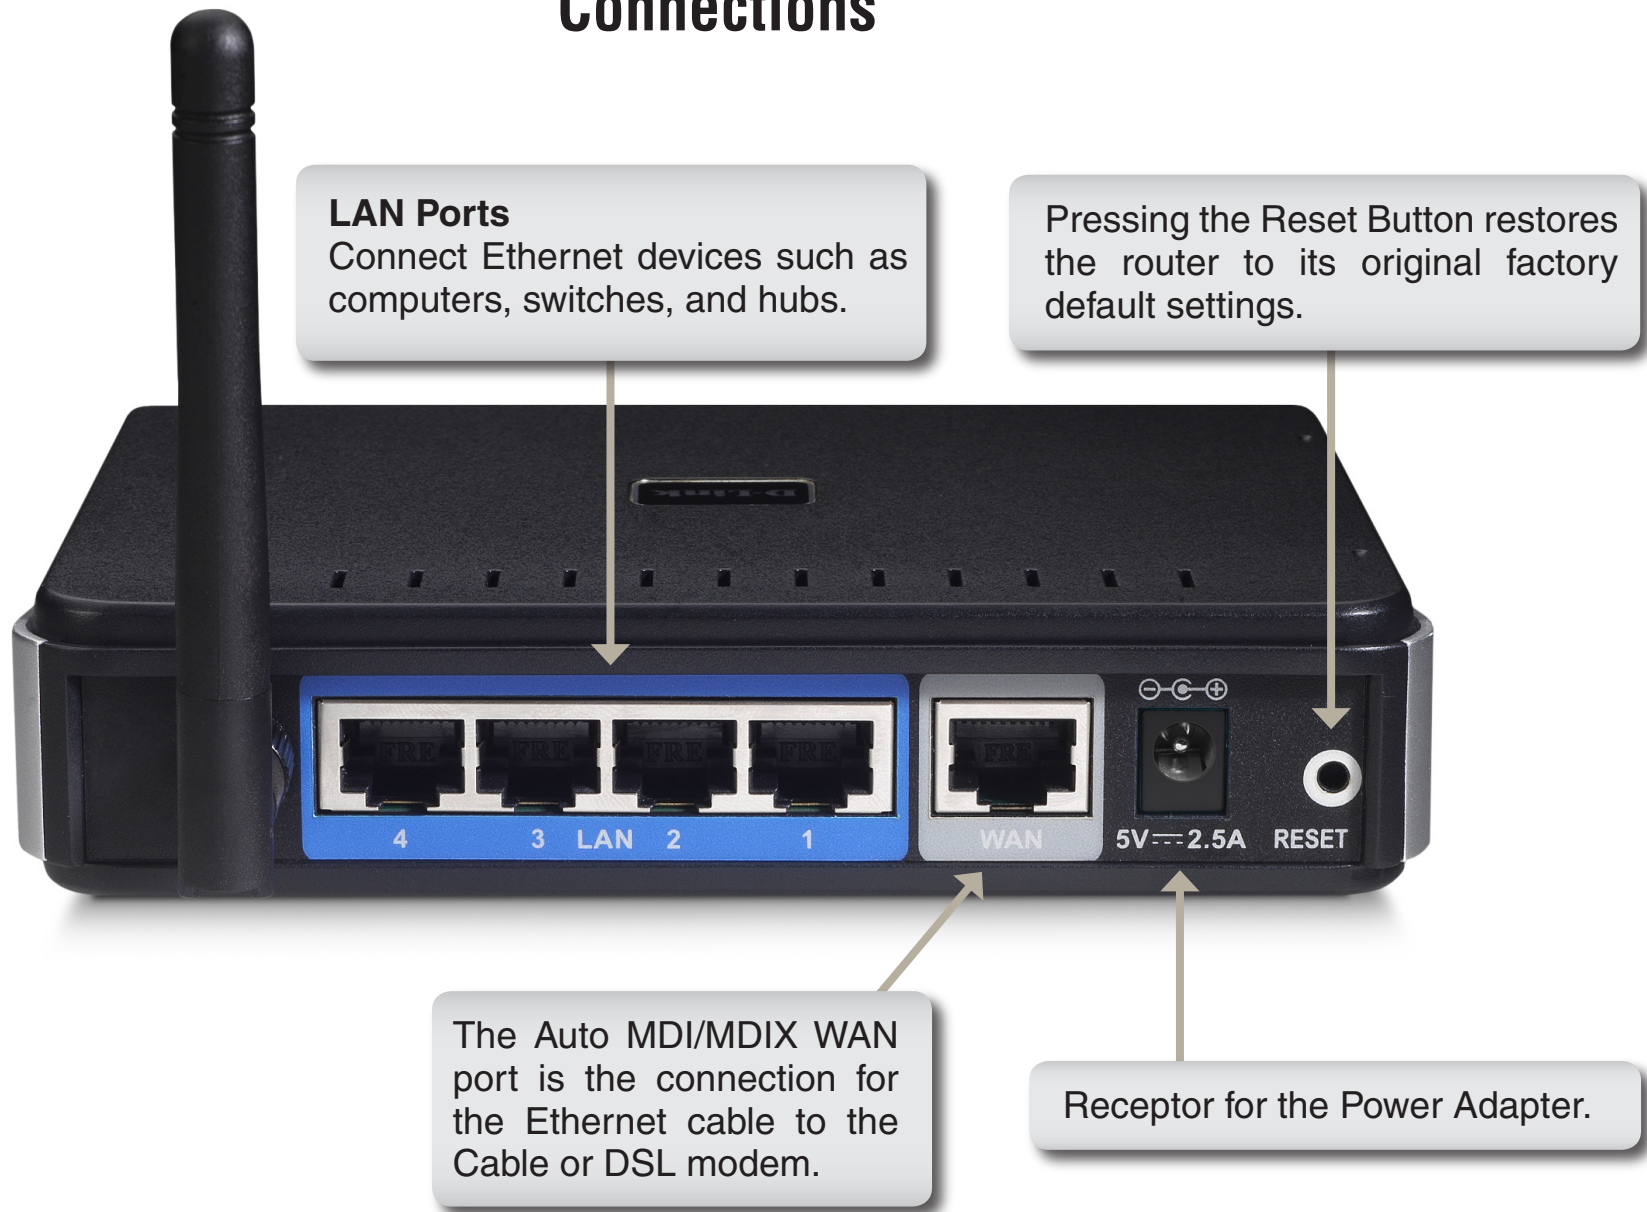

# Hardware Overview

## LEDs

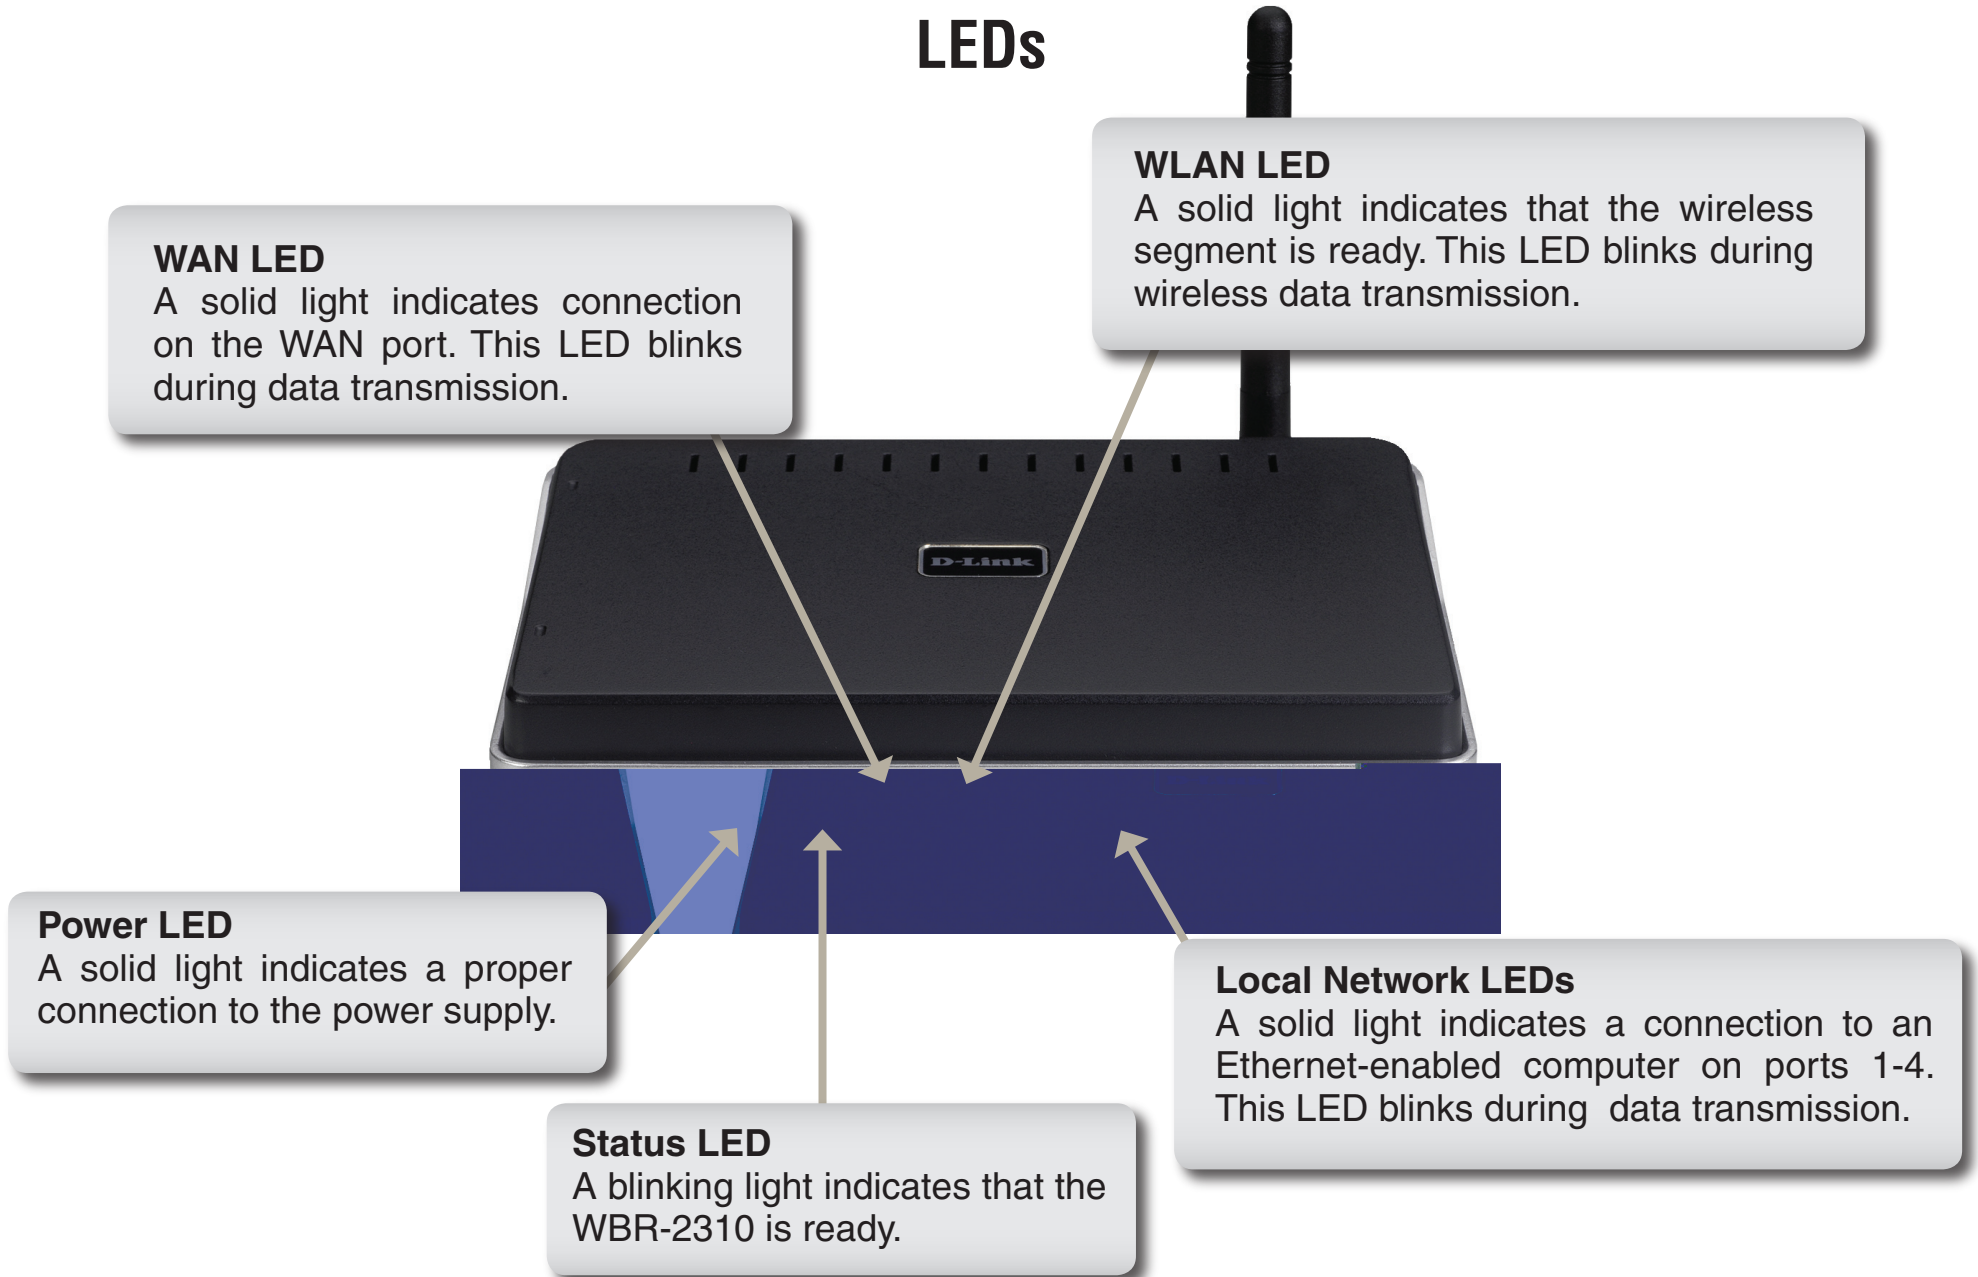

# Installation

This section will walk you through the installation process. Placement of the router is very important. Do not place the router in an enclosed area such as a closet, cabinet, or in the attic or garage.

## Before you Begin

- Please configure the router with the computer that was last connected directly to your modem.
- You can only use the Ethernet port on your modem. If you were using the USB connection before using the router, then you must turn off your modem, disconnect the USB cable and connect an Ethernet cable to the Internet port on the router, and then turn the modem back on. In some cases, you may need to call your ISP to change connection types (USB to Ethernet).
- If you have DSL and are connecting via PPPoE, make sure you disable or uninstall any PPPoE software such as WinPoet, Broadjump, or Enternet 300 from your computer or you will not be able to connect to the Internet.
- When running the Setup Wizard from the D-Link CD, make sure the computer you are running the CD from is connected to the Internet and online or the wizard will not work. If you have disconnected any hardware, re-connect your computer back to the modem and make sure you are online.



# Wireless Installation Considerations

The D-Link wireless router lets you access your network using a wireless connection from virtually anywhere within the operating range of your wireless network. Keep in mind, however, that the number, thickness and location of walls, ceilings, or other objects that the wireless signals must pass through, may limit the range. Typical ranges vary depending on the types of materials and background RF (radio frequency) noise in your home or business. The key to maximizing wireless range is to follow these basic guidelines:

1. Keep the number of walls and ceilings between the D-Link router and other network devices to a minimum - each wall or ceiling can reduce your adapter's range from 3-90 feet (1-30 meters.) Position your devices so that the number of walls or ceilings is minimized.
2. Be aware of the direct line between network devices. A wall that is 1.5 feet thick (.5 meters), at a 45-degree angle appears to be almost 3 feet (1 meter) thick. At a 2-degree angle it looks over 42 feet (14 meters) thick! Position devices so that the signal will travel straight through a wall or ceiling (instead of at an angle) for better reception.
3. Building Materials make a difference. A solid metal door or aluminum studs may have a negative effect on range. Try to position access points, wireless routers, and computers so that the signal passes through drywall or open doorways. Materials and objects such as glass, steel, metal, walls with insulation, water (fish tanks), mirrors, file cabinets, brick, and concrete will degrade your wireless signal.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.
5. If you are using 2.4GHz cordless phones or X-10 (wireless products such as ceiling fans, lights, and home security systems), your wireless connection may degrade dramatically or drop completely. Make sure your 2.4GHz phone base is as far away from your wireless devices as possible. The base transmits a signal even if the phone is not in use.

# Connect to Cable/DSL/Satellite Modem

If you are connecting the router to a cable/DSL/satellite modem, please follow the steps below:

1. Place the router in an open and central location. Do not plug the power adapter into the router.
2. Turn the power off on your modem. If there is no on/off switch, then unplug the modem's power adapter. Shut down your computer.
3. Unplug the Ethernet cable (that connects your computer to your modem) from your computer and place it into the WAN port on the router.
4. Plug an Ethernet cable into one of the four LAN ports on the router. Plug the other end into the Ethernet port on your computer.
5. Turn on or plug in your modem. Wait for the modem to boot (about 30 seconds).
6. Plug the power adapter to the router and connect to an outlet or power strip. Wait about 30 seconds for the router to boot.
7. Turn on your computer.
8. Verify the link lights on the router. The power light, WAN light, and the LAN light (the port that your computer is plugged into) should be lit. If not, make sure your computer, modem, and router are powered on and verify the cable connections are correct.
9. Skip two pages to the **Getting Started** section to configure your router.

# Connect to Another Router

If you are connecting the D-Link router to another router to use as a wireless access point and/or switch, you will have to do the following before connecting the router to your network:

- Disable UPnP™
- Disable DHCP
- Change the LAN IP address to an available address on your network. The LAN ports on the router cannot accept a DHCP address from your other router.

To connect to another router, please follow the steps below:

1. Plug the power into the router. Connect one of your computers to the router (LAN port) using an Ethernet cable. Make sure your IP address on the computer is 192.168.0.xxx (where xxx is between 2 and 254). Please see the **Networking Basics** section for more information. If you need to change the settings, write down your existing settings before making any changes. In most cases, your computer should be set to receive an IP address automatically in which case you will not have to do anything to your computer.
2. Open a web browser and enter **http://192.168.0.1** and press **Enter**. When the login window appears, set the user name to **admin** and leave the password box empty. Click **OK** to continue.
3. Click on **Advanced** and then click **Advanced Network**. Uncheck the Enable UPnP checkbox. Click **Save Settings** to continue.
4. Click **Setup** and then click **Network Settings**. Uncheck the Enable DHCP Server server checkbox. Click **Save Settings** to continue.
5. Under Router Settings, enter an available IP address and the subnet mask of your network. Click **Save Settings** to save your settings. Use this new IP address to access the configuration utility of the router in the future. Close the browser and change your computer's IP settings back to the original values as in Step 1.

6. Disconnect the Ethernet cable from the router and reconnect your computer to your network.
7. Connect an Ethernet cable in one of the LAN ports of the router and connect it to your other router. Do not plug anything into the WAN port of the D-Link router.
8. You may now use the other 3 LAN ports to connect other Ethernet devices and computers. To configure your wireless network, open a web browser and enter the IP address you assigned to the router. Refer to the **Configuration** and **Wireless Security** sections for more information on setting up your wireless network.

# Getting Started

The WBR-2310 includes a Quick Router Setup Wizard CD. Follow the simple steps below to run the Setup Wizard to guide you quickly through the installation process.

Insert the **Quick Router Setup Wizard CD** in the CD-ROM drive. The step-by-step instructions that follow are shown in Windows® XP. The steps and screens are similar to those found in other Windows operating systems.

If the CD Autorun function does not automatically start on your computer, go to **Start > Run**. In the run box, type **"D:\wbr2310.exe"** (where **D:** represents the drive letter of your CD-ROM drive).

When the autorun screen appears, click **INSTALL ROUTER**.




**Note:** It is recommended to write down the login password on the provided CD holder.

# Configuration

This section will show you how to configure your new D-Link wireless router using the web-based configuration utility.

## Web-based Configuration Utility

To access the configuration utility, open a web-browser such as Internet Explorer and enter the IP address of the router (192.168.0.1).

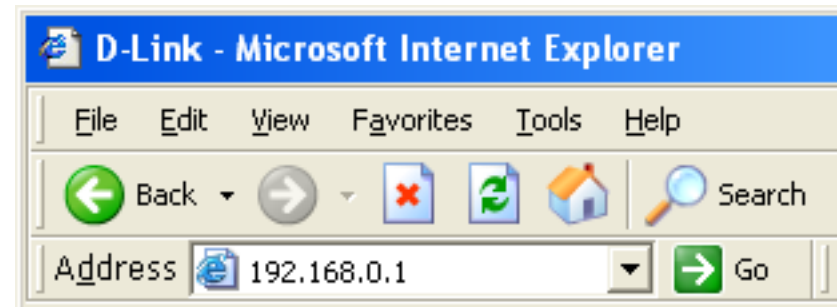

Enter the user name (admin) and your password. Leave the password blank by default.

A screenshot of the router's login page. The page has an orange header with the word "LOGIN" in white. Below the header, it says "Log in to the router:". There are two input fields: "User Name" with the text "admin" entered, and "Password" which is empty. A "Log In" button is located to the right of the password field.

If you get a **Page Cannot be Displayed** error, please refer to the **Troubleshooting** section for assistance.

# Internet Connection

You may click **Setup Wizard** to quickly configure your router. Refer to the next page.

If you want to enter your settings without running the wizard, click **Manual Configure** and skip to page 19.

The screenshot displays the D-Link WBR-2310 web interface. At the top, the D-Link logo is visible. Below it, a navigation bar contains tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The main content area is titled 'INTERNET CONNECTION' and provides instructions on how to set up the Internet connection. It offers two options: using the Setup Wizard or Manual Configure. The Setup Wizard section includes a button labeled 'Setup Wizard' and a note about following the Quick Installation Guide. The Manual Configure section includes a button labeled 'Manual Configure'. On the right side, there is a 'Helpful Hints..' section with 'Wizard' and 'Manual' instructions.

D-Link						
WBR-2310	<table border="1"> <tr> <th>SETUP</th> <th>ADVANCED</th> <th>TOOLS</th> <th>STATUS</th> <th>SUPPORT</th> </tr> </table>	SETUP	ADVANCED	TOOLS	STATUS	SUPPORT
SETUP	ADVANCED	TOOLS	STATUS	SUPPORT		
INTERNET	<p><b>INTERNET CONNECTION :</b></p> <p>There are 2 ways to setup your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection.</p> <p><b>INTERNET CONNECTION WIZARD :</b></p> <p>If you would like to utilize our easy to use Web-based Wizards to assist you in connecting your new D-Link Router to the Internet, as well as configure the Wireless settings, click on the Setup Wizard button below.</p> <p><input type="button" value="Setup Wizard"/></p> <p><b>Note:</b> Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p> <p><b>MANUAL INTERNET CONNECTION OPTIONS :</b></p> <p>If you would like to configure the Internet and Wireless settings of your new D-Link Router manually, then click on the Manual Configure button below.</p> <p><input type="button" value="Manual Configure"/></p>					
WIRELESS SETTINGS	<p><b>Helpful Hints..</b></p> <p><b>Wizard:</b> If you are new to networking and have never configured a router before, click on <b>Setup Wizard</b> and the router will run you through a few simple steps to get your network up and running.</p> <p><b>Manual:</b> If you consider yourself an Advanced user and have configured a router before, click <b>Manual Configure</b> to input all the settings manually.</p>					
NETWORK SETTINGS						



# Internet Connection Setup Wizard

You may run the setup wizard to quickly setup your router. Click **Setup Wizard** to launch the wizard. Click **Launch Internet Connection Setup Wizard** to begin.

**D-Link**

WBR-2310

SETUP ADVANCED TOOLS STATUS SUPPORT

INTERNET WIRELESS SETTINGS NETWORK SETTINGS

**WIZARD**

The Wizards below will assist you in configuring the basic settings of your new D-Link Router.

**INTERNET CONNECTION SETUP WIZARD**

The following Web-based Setup Wizard is designed to assist you in connecting your new D-Link Router to the Internet. This Setup Wizard will guide you through step-by-step instructions on how to get your Internet connection up and running. Click the button below to begin.

Launch Internet Connection Setup Wizard

**Note:** Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

**WIRELESS SECURITY SETUP WIZARD**

The following Web-based Setup Wizard is designed to assist you in your wireless network setup. This Setup Wizard will guide you through step-by-step instructions on how to set up your wireless network and how to make it secure.

Launch Wireless Security Setup Wizard

**Note:** Some changes made using this Setup Wizard may require you to change some settings on your wireless client adapters so they can still connect to the D-Link Router.

**Helpful Hints.**

**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.

**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.

**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.

**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

Click **Next** to continue.

**D-Link**

**WELCOME TO THE D-LINK SETUP WIZARD**

This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

**STEP 1: SET YOUR PASSWORD**

- Step 1: Set your Password
- Step 2: Select your Time Zone
- Step 3: Configure your Internet Connection
- Step 4: Save Settings and Connect

Next Cancel

Create a new password and then click **Next** to continue.

**D-Link**

**WELCOME TO THE D-LINK SETUP WIZARD**

This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

**STEP 1: SET YOUR PASSWORD**


By default, your new D-Link Router does not have a password configured for administrator access to the Web-based configuration pages. To secure your new networking device, please set and verify a password below:

Password :


Verify Password :

Prev Next Cancel


Select your time zone from the drop-down menu and then click **Next** to continue.

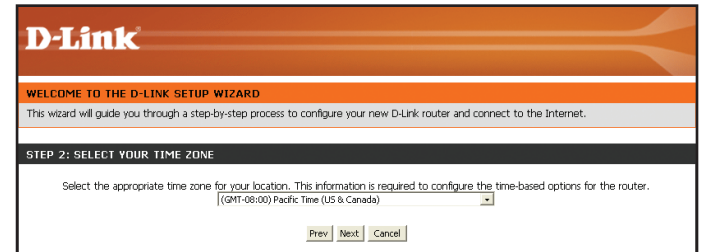

Select the type of Internet connection you use and then click **Next** to continue.

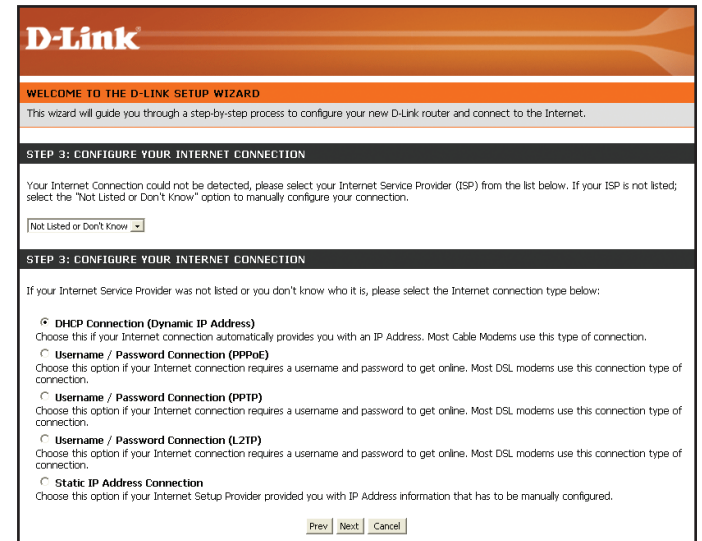

If you selected Dynamic, you may need to enter the MAC address of the computer that was last connected directly to your modem. If you are currently using that computer, click **Clone Your PC's MAC Address** and then click **Next** to continue.

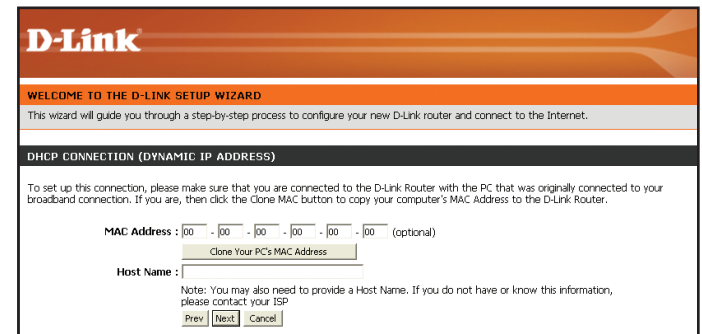

The Host Name is optional but may be required by some ISPs. The default host name is the device name of the Router and may be changed.

If you selected PPPoE, enter your PPPoE username and password. Click **Next** to continue.

Select **Static** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses.

**Note:** Make sure to remove your PPPoE software from your computer. The software is no longer needed and will not work through a router.

If you selected PPTP, enter your PPTP username and password. Click **Next** to continue.

If you selected L2TP, enter your L2TP username and password. Click **Next** to continue.

**D-Link**

**WELCOME TO THE D-LINK SETUP WIZARD**  
This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

**SET USERNAME AND PASSWORD CONNECTION (PPPoE)**

To set up this connection you will need to have a Username and Password from your Internet Service Provider. If you do not have this information, please contact your ISP.

Address Mode:  Dynamic IP  Static IP

IP Address: [0.0.0.0]

User Name: [pppoeusername]

Password: [.....]

Verify Password: [.....]

Service Name: [ ] (optional)

Note: You may also need to provide a Service Name. If you do not have or know this information, please contact your ISP.

[Prev] [Next] [Cancel]

**D-Link**

**WELCOME TO THE D-LINK SETUP WIZARD**  
This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

**SET USERNAME AND PASSWORD CONNECTION (PPTP)**

To set up this connection you will need to have a Username and Password from your Internet Service Provider. You also need PPTP IP address. If you do not have this information, please contact your ISP.

Address Mode:  Dynamic IP  Static IP

PPTP IP Address: [0.0.0.0]

PPTP Subnet Mask: [0.0.0.0]

PPTP Gateway IP Address: [0.0.0.0]

PPTP Server IP Address (may be same as gateway): [0.0.0.0]

User Name: [ ]

Password: [.....]

Verify Password: [.....]

[Prev] [Next] [Cancel]

**D-Link**

**WELCOME TO THE D-LINK SETUP WIZARD**  
This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.

**SET USERNAME AND PASSWORD CONNECTION (L2TP)**

To set up this connection you will need to have a Username and Password from your Internet Service Provider. You also need L2TP IP address. If you do not have this information, please contact your ISP.

Address Mode:  Dynamic IP  Static IP

L2TP IP Address: [0.0.0.0]

L2TP Subnet Mask: [0.0.0.0]

L2TP Gateway IP Address: [0.0.0.0]

L2TP Server IP Address (may be same as gateway): [0.0.0.0]

User Name: [ ]

Password: [.....]

Verify Password: [.....]

[Prev] [Next] [Cancel]

If you selected Static, enter your network settings supplied by your Internet provider. Click **Next** to continue.

Click Connect to save your settings. Once the router is finished rebooting, click Continue. Please allow 1-2 minutes to connect.

Close your browser window and reopen it to test your Internet connection. It may take a few tries to initially connect to the Internet.

The screenshot shows the 'SET STATIC IP ADDRESS CONNECTION' step of the D-Link Setup Wizard. The page has an orange header with the D-Link logo. Below the header, it says 'WELCOME TO THE D-LINK SETUP WIZARD' and 'This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.' The main heading is 'SET STATIC IP ADDRESS CONNECTION'. Below this, there is a paragraph: 'To set up this connection you will need to have a complete list of IP information provided by your Internet Service Provider. If you have a Static IP connection and do not have this information, please contact your ISP.' There are five input fields, each with a label and a value of '0.0.0.0': 'IP Address', 'Subnet Mask', 'Gateway Address', 'Primary DNS Address', and 'Secondary DNS Address'. At the bottom right, there are three buttons: 'Prev', 'Next', and 'Cancel'.

The screenshot shows the 'SETUP COMPLETE!' step of the D-Link Setup Wizard. The page has an orange header with the D-Link logo. Below the header, it says 'WELCOME TO THE D-LINK SETUP WIZARD' and 'This wizard will guide you through a step-by-step process to configure your new D-Link router and connect to the Internet.' The main heading is 'SETUP COMPLETE!'. Below this, there is a paragraph: 'The Setup Wizard has completed. Click the Connect button to save your settings and reboot the router.' At the bottom right, there are three buttons: 'Prev', 'Connect', and 'Cancel'.

# Internet Setup

## Dynamic (Cable)

**Dynamic IP Address:** Choose Dynamic IP Address to obtain IP Address information automatically from your ISP. Select this option if your ISP does not give you any IP numbers to use. This option is commonly used for Cable modem services.

**Host Name:** The Host Name is optional but may be required by some ISPs. The default host name is the device name of the Router and may be changed.

**MAC Address:** The default MAC Address is set to the WAN's physical interface MAC address on the Broadband Router. It is not recommended that you change the default MAC address unless required by your ISP.

**Clone MAC Address:** The default MAC address is set to the WAN's physical interface MAC address on the Broadband Router. You can use the "Clone MAC Address" button to copy the MAC address of the Ethernet Card installed by your ISP and replace the WAN MAC address with the MAC address of the router. It is not recommended that you change the default MAC address unless required by your ISP.

**DNS Addresses:** Enter the Primary DNS server IP address assigned by your ISP.

**MTU:** Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. 1500 is the default MTU.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'D-Link', 'WBR-2310', and tabs for 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The 'SETUP' tab is active, and the 'INTERNET' section is selected. The main content area is titled 'INTERNET CONNECTION' and contains the following information:

**INTERNET CONNECTION**  
Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

**Note:** If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Buttons: Save Settings, Don't Save Settings

**INTERNET CONNECTION TYPE :**  
Choose the mode to be used by the router to connect to the Internet.  
My Internet Connection is :

**DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE :**  
Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.

Host Name :   
 MAC Address :  -  -  -  -  -  (optional)  
  
 Primary DNS Address :   
 Secondary DNS Address :  (optional)  
 MTU :

**Helpful Hints..**  
**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.  
**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.  
**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.  
**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

# Internet Setup

## PPPoE (DSL)

Choose PPPoE (Point to Point Protocol over Ethernet) if your ISP uses a PPPoE connection. Your ISP will provide you with a username and password. This option is typically used for DSL services. Make sure to remove your PPPoE software from your computer. The software is no longer needed and will not work through a router.

**PPPoE:** Select **Dynamic** (most common) or **Static**. Select **Static** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses.

**User Name:** Enter your PPPoE user name.

**Password:** Enter your PPPoE password and then retype the password in the next box.

**Service Name:** Enter the ISP Service Name (optional).

**IP Address:** Enter the IP address (Static PPPoE only).

**DNS Addresses:** Enter the Primary and Secondary DNS Server Addresses (Static PPPoE only).

**Maximum Idle Time:** Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

**MTU:** Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. 1492 is the default MTU.

**Connection Mode Select:** Select either **Always-on**, **Manual**, or **Connect-on demand**.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'WBR-2310 //', 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The left sidebar has 'INTERNET', 'WIRELESS SETTINGS', and 'NETWORK SETTINGS'. The main content area is titled 'INTERNET CONNECTION' and contains the following sections:

- INTERNET CONNECTION:** A text box explaining the section's purpose and a note about removing PPPoE client software. Below are 'Save Settings' and 'Don't Save Settings' buttons.
- INTERNET CONNECTION TYPE:** A dropdown menu set to 'PPPoE (Username / Password)'. A text box below says 'Choose the mode to be used by the router to connect to the Internet.'
- PPPOE:** A section for entering ISP information. It includes radio buttons for 'Dynamic PPPoE' (selected) and 'Static PPPoE'. Fields include:
  - User Name: [ ]
  - Password: [ ]
  - Retype Password: [ ]
  - Service Name: [ ] (optional)
  - IP Address: [0.0.0.0]
  - MAC Address: [00 - 10 - ab - cd - ee - 04] (optional) with a 'Clone MAC Address' button.
  - Primary DNS Address: [0.0.0.0]
  - Secondary DNS Address: [0.0.0.0] (optional)
  - Maximum Idle Time: [5] Minutes
  - MTU: [1492]
  - Connect mode select:  Always-on  Manual  Connect-on demand

On the right side, there are 'Helpful Hints..' sections: 'Wireless Settings', 'Wireless Radio', 'SSID', and 'Auto Channel Select', each with a brief description of their function.



# Internet Setup

## PPTP

Choose PPTP (Point-to-Point-Tunneling Protocol ) if your ISP uses a PPTP connection. Your ISP will provide you with a username and password. This option is typically used for DSL services.

**PPTP:** Select **Dynamic** (most common) or **Static**. Select **Static** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses.

**IP Address:** Enter the IP address (Static PPTP only).

**Subnet Mask:** Enter the Primary and Secondary DNS Server Addresses (Static PPTP only).

**Gateway:** Enter the Gateway IP Address provided by your ISP (Static PPTP only).

**DNS:** The DNS server information will be supplied by your ISP (Internet Service Provider.)

**Server IP:** Enter the Server IP provided by your ISP.

**PPTP Account:** Enter your PPTP account name.

**PPTP Password:** Enter your PPTP password and then retype the password in the next box.

**Maximum Idle Time:** Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

**MTU:** Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. 1400 is the default MTU.

**Connect Mode:** Select either **Always-on**, **Manual**, or **Connect-on demand**.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The left sidebar lists 'INTERNET', 'WIRELESS SETTINGS', and 'NETWORK SETTINGS'. The main content area is titled 'INTERNET CONNECTION' and contains the following sections:

- INTERNET CONNECTION:** A text box explaining the connection types and a note about PPPoE. Below it are 'Save Settings' and 'Don't Save Settings' buttons.
- INTERNET CONNECTION TYPE:** A dropdown menu set to 'PPTP (Username / Password)'. Below it is a text box for 'My Internet Connection is:'.
- PPTP:** Radio buttons for 'Dynamic IP' (selected) and 'Static IP'. Below are input fields for 'IP Address', 'Subnet Mask', 'Gateway', and 'DNS', all with '0.0.0.0' entered. There are also fields for 'Server IP/Name', 'PPTP Account', 'PPTP Password', and 'PPTP Retype password'. A 'Maximum Idle Time' field is set to '5' minutes, and an 'MTU' field is set to '1400'. At the bottom, 'Connect mode select' has radio buttons for 'Always-on', 'Manual', and 'Connect-on demand' (selected).

On the right side of the interface, there are three informational sections: 'Helpful Hints...', 'Wireless Radio', and 'SSID'. The 'Wireless Radio' section explains that the option turns on or off the wireless connection. The 'SSID' section explains that it is the name that identifies a specific wireless local area network (WLAN). The 'Auto Channel Select' section explains that the router automatically finds the channel with least interference when this option is enabled.



# Internet Setup

## L2TP

Choose L2TP (Layer 2 Tunneling Protocol) if your ISP uses a L2TP connection. Your ISP will provide you with a username and password. This option is typically used for DSL services.

**L2TP:** Select **Dynamic** (most common) or **Static**. Select **Static** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses.

**IP Address:** Enter the IP address (Static L2TP only).

**Subnet Mask:** Enter the Primary and Secondary DNS Server Addresses (Static L2TP only).

**Gateway:** Enter the Gateway IP Address provided by your ISP (Static L2TP only).

**DNS:** The DNS server information will be supplied by your ISP (Internet Service Provider.)

**Server IP:** Enter the Server IP provided by your ISP.

**L2TP Account:** Enter your L2TP account name.

**L2TP Password:** Enter your L2TP password and then retype the password in the next box.

**Maximum Idle Time:** Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable Auto-reconnect.

**MTU:** Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. 1400 is the default MTU.

**Connect Mode:** Select either **Always-on**, **Manual**, or **Connect-on demand**.

**D-Link**

WBR-2310 //

SETUP ADVANCED TOOLS STATUS SUPPORT

INTERNET WIRELESS SETTINGS NETWORK SETTINGS

**INTERNET CONNECTION**

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

**Note:** If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings Don't Save Settings

**INTERNET CONNECTION TYPE :**

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is : L2TP (Username / Password)

**L2TP :**

Enter the information provided by your Internet Service Provider (ISP).

Dynamic IP  Static IP

IP Address : 0.0.0.0

Subnet Mask : 0.0.0.0

Gateway : 0.0.0.0

DNS : 0.0.0.0

Server IP/Name : \_\_\_\_\_

L2TP Account : \_\_\_\_\_

L2TP Password : .....

L2TP Retype password : .....

Maximum Idle Time : 5 Minutes

MTU : 1400

Connect mode select :  Always-on  Manual  Connect-on demand

**Helpful Hints...**

**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.

**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.

**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.

**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

# Internet Setup

## Big Pond

**User Name:** Enter your Big Pond user name.

**Password:** Enter your Big Pond password and then retype the password in the next box.

**Auth Server:** Enter the IP address of the login server.

**Login Server IP:** Enter the IP address of the login server.

**MAC Address:** The default MAC Address is set to the WAN's physical interface MAC address on the Broadband Router. It is not recommended that you change the default MAC address unless required by your ISP.

**Clone MAC Address:** The default MAC address is set to the WAN's physical interface MAC address on the Broadband Router. You can use the "Clone MAC Address" button to copy the MAC address of the Ethernet Card installed by your ISP and replace the WAN MAC address with the MAC address of the router. It is not recommended that you change the default MAC address unless required by your ISP.

**D-Link**

WBR-2310 //

SETUP    ADVANCED    TOOLS    STATUS    SUPPORT

INTERNET

WIRELESS SETTINGS

NETWORK SETTINGS

**INTERNET CONNECTION**

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

**Note:** If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings    Don't Save Settings

**INTERNET CONNECTION TYPE :**

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is :

**BIGPOND :**

Enter the information provided by your Internet Service Provider (ISP).

User Name :

Password :

Retype Password :

Auth Server :

Login Server IP/Name :  (optional)

MAC Address :  (optional)

**Helpful Hints..**

**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.

**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.

**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.

**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

# Internet Setup

## Static (assigned by ISP)

Select Static IP Address if all WAN IP information is provided to you by your ISP. You will need to enter in the IP address, subnet mask, gateway address, and DNS address(es) provided to you by your ISP. Each IP address entered in the fields must be in the appropriate IP form, which are four octets separated by a dot (x.x.x.x). The Router will not accept the IP address if it is not in this format.

**IP Address:** Enter the IP address assigned by your ISP.

**Subnet Mask:** Enter the Subnet Mask assigned by your ISP.

**ISP Gateway:** Enter the Gateway assigned by your ISP.

**MAC Address:** The default MAC Address is set to the WAN's physical interface MAC address on the Broadband Router. It is not recommended that you change the default MAC address unless required by your ISP.

**Clone MAC Address:** The default MAC address is set to the WAN's physical interface MAC address on the Broadband Router. You can use the **Clone MAC Address** button to copy the MAC address of the Ethernet Card installed by your ISP and replace the WAN MAC address with the MAC address of the router. It is not recommended that you change the default MAC address unless required by your ISP.

**Primary DNS Address:** Enter the Primary DNS server IP address assigned by your ISP.

**Secondary DNS Address:** Enter the Secondary DNS server IP address assigned by your ISP.

**MTU:** Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. 1500 is the default MTU.

The screenshot shows the D-Link WBR-2310 Internet Setup page. The page is titled "INTERNET CONNECTION" and includes a "Helpful Hints..." sidebar on the right. The main content area is divided into sections: "INTERNET CONNECTION TYPE" and "STATIC IP ADDRESS INTERNET CONNECTION TYPE".

**INTERNET CONNECTION TYPE:** Choose the mode to be used by the router to connect to the Internet. My Internet Connection is:

**STATIC IP ADDRESS INTERNET CONNECTION TYPE:** Enter the static address information provided by your Internet Service Provider (ISP).

IP Address:  (assigned by your ISP)  
 Subnet Mask:   
 ISP Gateway Address:   
 MAC Address:  -  -  -  -  -  (optional)  
  
 Primary DNS Address:   
 Secondary DNS Address:  (optional)  
 MTU:

**Helpful Hints...**

**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.

**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.

**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.

**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

## Wireless Settings

If you want to configure the wireless settings on your router using the wizard, click on the **Setup** tab and then click **Internet** on the left side. Click the **Setup Wizard** button and then click the **Launch Wireless Security Setup Wizard** button. Skip to page 73.

If you want to manually configure the wireless settings on your router, click the **Setup** tab and then click **Wireless Settings** on the left side. Refer to the next page.

### INTERNET CONNECTION SETUP WIZARD

The following Web-based Setup Wizard is designed to assist you in connecting your new D-Link Router to the Internet. This Setup Wizard will guide you through step-by-step instructions on how to get your Internet connection up and running. Click the button below to begin.

[Launch Internet Connection Setup Wizard](#)

**Note:** Before launching these wizards, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.

### WIRELESS SECURITY SETUP WIZARD

The following Web-based Setup Wizard is designed to assist you in your wireless network setup. This Setup Wizard will guide you through step-by-step instructions on how to set up your wireless network and how to make it secure.

[Launch Wireless Security Setup Wizard](#)

**Note:** Some changes made using this Setup Wizard may require you to change some settings on your wireless client adapters so they can still connect to the D-Link Router.

# Manual Wireless Settings

**Enable Wireless:** Check the box to enable the wireless function. If you do not want to use wireless, uncheck the box to disable all the wireless functions.

**Wireless Network Name:** Service Set Identifier (SSID) is the name of your wireless network. Create a name using up to 32 characters. The SSID is case-sensitive.

**Wireless Channel:** Indicates the channel setting for the WBR-2310. By default the channel is set to **Auto**. The Channel can be changed to fit the channel setting for an existing wireless network or to customize the wireless network. The **Auto Channel Scan** setting can be selected to allow the WBR-2310 to choose the channel with the least amount of interference.

**Super G Mode:** Super G is a group of performance enhancement features that increase end user application throughput in an 802.11g network. Super G is backwards compatible to standard 802.11g devices. For top performance, all wireless devices on the network should be Super G capable. Select either Disabled, Super G without Turbo, Super G with Dynamic Turbo.

- **Disabled** - Standard 802.11g support, no enhanced capabilities.
- **Super G without Turbo** - Capable of Packet Bursting, FastFrames, Compression, but no Turbo mode.
- **Super G with Dynamic Turbo** - Capable of Packet Bursting, FastFrames, Compression, and Dynamic Turbo. This setting is backwards compatible with non-Turbo (legacy) devices. Dynamic Turbo mode is only enabled when all devices on the wireless network are Super G with Dynamic Turbo enabled.

**Extended Range Mode:** Extended Range Mode helps reduce dead spots by improving the reception algorithm, which allows your wireless clients to associate with the WBR-2310 at farther distances. Check the box to enable it.

**802.11g Only Mode:** Enable this mode if your network is made up of purely 802.11g devices. If you have both 802.11b and 802.11g wireless clients, uncheck the box.

**Enable Hidden Wireless:** Check this option if you would not like the SSID of your wireless network to be broadcasted by the WBR-2310. If this option is checked, the SSID of the WBR-2310 will not be seen by Site Survey utilities so your wireless clients will have to know the SSID of your WBR-2310 in order to connect to it.

**D-Link**

WBR-2310 // SETUP ADVANCED TOOLS STATUS SUPPORT

INTERNET

WIRELESS SETTINGS

NETWORK SETTINGS

**WIRELESS NETWORK :**

Use this section to configure the wireless settings for your D-Link Router. Please note that changes made on this section may also need to be duplicated on your Wireless Client.

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP or WPA-Personal.

Save Settings Don't Save Settings

**WIRELESS NETWORK SETTINGS :**

Enable Wireless :

Wireless Network Name : dlink (Also called the SSID)

Wireless Channel : 6

Enable Auto Channel Scan :

Super G Mode : Super G with Dynamic Turbo

Enable Extended Range Mode :

802.11g Only Mode :

Enable Hidden Wireless :  (Also called the SSID Broadcast)

**WIRELESS SECURITY MODE :**

Security Mode : Disable Wireless Security (not recommended)

**Helpful Hints.**

**Wireless Settings**  
The Wireless Settings section is used to configure the wireless AP (Access Point) portion of the router. Note that some changes made in this section may also need to be matched by the wireless client devices.

**Wireless Radio**  
This option turns on or off the wireless connection feature of the router. When the radio is turned on, the following wireless parameters are displayed.

**SSID**  
Service Set Identifier (SSID) is the name that identifies a specific wireless local area network (WLAN). When a wireless device is browsing for available wireless networks, this is the name that will appear in the list.

**Auto Channel Select**  
If you select this option, the router automatically finds the channel with least interference and uses that channel for wireless networking. If you disable this option, the router uses the channel that you specify with the Channel option.

# Network Settings

This section will allow you to change the local network settings of the router and to configure the DHCP settings.

**IP Address:** Enter the IP address of the router. The default IP address is 192.168.0.1.

If you change the IP address, once you click Apply, you will need to enter the new IP address in your browser to get back into the configuration utility.

**Subnet Mask:** Enter the Subnet Mask. The default subnet mask is 255.255.255.0.

**Local Domain:** Enter the Domain name (Optional).

**Enable DNS Relay:** Check the box to transfer the DNS server information from your ISP to your computers. If unchecked, your computers will use the router for a DNS server.

Refer to the next page for DHCP information.

The screenshot displays the D-Link WBR-2310 web-based management interface. The top navigation bar includes the D-Link logo and tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The left sidebar shows a menu with options for INTERNET, WIRELESS SETTINGS, and NETWORK SETTINGS. The main content area is titled 'NETWORK SETTINGS' and contains three sections: 'NETWORK SETTINGS', 'ROUTER SETTINGS', and 'DHCP SERVER SETTINGS'. The 'NETWORK SETTINGS' section includes a description and 'Save Settings' and 'Don't Save Settings' buttons. The 'ROUTER SETTINGS' section includes fields for Router IP Address (192.168.0.1), Default Subnet Mask (255.255.255.0), Local Domain Name, and an 'Enable DNS Relay' checkbox (checked). The 'DHCP SERVER SETTINGS' section includes an 'Enable DHCP Server' checkbox (checked), a 'DHCP IP Address Range' field (100 to 199), and a 'DHCP Lease Time' field (180 minutes). A 'Helpful Hints..' sidebar on the right provides information about DHCP Server and DHCP Reservation.

WBR-2310	SETUP	ADVANCED	TOOLS	STATUS	SUPPORT
INTERNET	<b>NETWORK SETTINGS :</b>				<b>Helpful Hints..</b> <b>DHCP Server:</b> If you already have a DHCP server on your network or are using static IP addresses on all the devices on your network, uncheck <b>Enable DHCP Server</b> to disable this feature.  <b>DHCP Reservation:</b> In order to ensure that devices on your network are always assigned the same IP address, add a <b>DHCP Reservation</b> for each device.
WIRELESS SETTINGS	Use this section to configure the internal network settings of your router and also to configure the built-in DHCP Server to assign IP addresses to the computers on your network. The IP Address that is configured here is the IP Address that you use to access the Web-based management interface. If you change the IP Address here, you may need to adjust your PC's network settings to access the network again.				
NETWORK SETTINGS	Save Settings    Don't Save Settings				
	<b>ROUTER SETTINGS :</b>				
	Use this section to configure the internal network settings of your router. The IP Address that is configured here is the IP Address that you use to access the Web-based management interface. If you change the IP Address here, you may need to adjust your PC's network settings to access the network again.				
	Router IP Address : <input type="text" value="192.168.0.1"/> Default Subnet Mask : <input type="text" value="255.255.255.0"/> Local Domain Name : <input type="text"/> Enable DNS Relay : <input checked="" type="checkbox"/>				
	<b>DHCP SERVER SETTINGS :</b>				
	Use this section to configure the built-in DHCP Server to assign IP addresses to the computers on your network.				
	Enable DHCP Server : <input checked="" type="checkbox"/> DHCP IP Address Range : <input type="text" value="100"/> to <input type="text" value="199"/> (addresses within the LAN subnet) DHCP Lease Time : <input type="text" value="180"/> (minutes)				

## DHCP Server Settings

DHCP stands for Dynamic Host Control Protocol. The WBR-2310 has a built-in DHCP server. The DHCP Server will automatically assign an IP address to the computers on the LAN/private network. Be sure to set your computers to be DHCP clients by setting their TCP/IP settings to “Obtain an IP Address Automatically.” When you turn your computers on, they will automatically load the proper TCP/IP settings provided by the WBR-2310. The DHCP Server will automatically allocate an unused IP address from the IP address pool to the requesting computer. You must specify the starting and ending address of the IP address pool.

**Enable DHCP Server:** Check the box to enable the DHCP server on your router. Uncheck to disable this function.

**DHCP IP Address Range:** Enter the starting and ending IP addresses for the DHCP server’s IP assignment.

**Lease Time:** The length of time for the IP address lease. Enter the Lease time in minutes.

### DHCP SERVER SETTINGS :

Use this section to configure the built-in DHCP Server to assign IP addresses to the computers on your network.

Enable DHCP Server :

DHCP IP Address Range :  to  (addresses within the LAN subnet)

DHCP Lease Time :  (minutes)



## DHCP Reservation

If you want a computer or device to always have the same IP address assigned, you can create a DHCP reservation. The router will assign the IP address only to that computer or device.

**Note:** This IP address must be within the DHCP IP Address Range.

**Enable:** Check this box to enable the reservation.

**Computer Name:** Enter the computer name or select from the drop-down menu and click <<. If you select the computer from the drop-down menu, the MAC address will automatically be entered.

**IP Address:** Enter the IP address you want to assign to the computer or device. This IP address must be within the DHCP IP Address Range.

**MAC Address:** Enter the MAC address of the computer or device.

**Save:** Click **Save** to save your entry. You must click **Save Settings** at the top to activate your reservations.

**ADD DHCP RESERVATION :**

Enable :

Computer Name :  <<

IP Address : 192 . 168 . 0 .

MAC Address :  -  -  -  -  -

---

**DHCP RESERVATIONS LIST :**

Enable	Computer Name	IP Address	MAC Address

---

**DYNAMIC DHCP CLIENT LIST :**

Host Name	IP Address	MAC Address	Expired Time
PM_test01	192.168.0.150	00-04-23-2c-51-a3	Jan/01/2008 03:19:14

**ADD DHCP RESERVATION :**

Enable :

Computer Name :  <<

IP Address : 192 . 168 . 0 .

MAC Address :  -  -  -  -  -

---

**DHCP RESERVATIONS LIST :**

Enable	Computer Name	IP Address	MAC Address
<input checked="" type="checkbox"/>	PM_test01	192.168.0.150	00-04-23-2c-51-a3

---

**DYNAMIC DHCP CLIENT LIST :**

Host Name	IP Address	MAC Address	Expired Time

# Virtual Server

The WBR-2310 can be configured as a virtual server so that remote users accessing Web or FTP services via the public IP address can be automatically redirected to local servers in the LAN (Local Area Network).

The WBR-2310 firewall feature filters out unrecognized packets to protect your LAN network so all computers networked with the WBR-2310 are invisible to the outside world. If you wish, you can make some of the LAN computers accessible from the Internet by enabling Virtual Server. Depending on the requested service, the WBR-2310 redirects the external service request to the appropriate server within the LAN network.

The WBR-2310 is also capable of port-redirection meaning incoming traffic to a particular port may be redirected to a different port on the server computer.

Each virtual service that is created will be listed at the bottom of the screen in the Virtual Servers List. There are pre-defined virtual services already in the table. You may use them by enabling them and assigning the server IP to use that particular virtual service.

**D-Link**

WBR-2310 // SETUP ADVANCED TOOLS STATUS SUPPORT

**VIRTUAL SERVER**

PORT FORWARDING  
APPLICATION RULES  
NETWORK FILTER  
WEBSITE FILTER  
FIREWALL SETTINGS  
ADVANCED WIRELESS  
ADVANCED NETWORK

**VIRTUAL SERVER RULES :**

The Virtual Server option allows you to define a single public port on your router for redirection to an internal LAN IP Address and Private LAN port if required. This feature is useful for hosting online services such as FTP or Web Servers.

Save Settings Don't Save Settings

**20 - VIRTUAL SERVER RULES**

	Name	IP Address	Port	Traffic Type	Schedule
<input type="checkbox"/>	<input type="text"/> << Application Name	<input type="text"/> 0.0.0.0 << Computer Name	Public 0	TCP	Always
<input type="checkbox"/>	<input type="text"/> << Application Name	<input type="text"/> 0.0.0.0 << Computer Name	Public 0	TCP	Always
<input type="checkbox"/>	<input type="text"/> << Application Name	<input type="text"/> 0.0.0.0 << Computer Name	Public 0	TCP	Always
<input type="checkbox"/>	<input type="text"/> << Application Name	<input type="text"/> 0.0.0.0 << Computer Name	Public 0	TCP	Always

**Helpful Hints..**

**Application Names:**  
Check the **Application Name** drop down menu for a list of pre-defined applications that you can select from. If you select one of the pre-defined applications, click the arrow button next to the drop down menu to fill out the appropriate fields.

**Computer Names:**  
You can select your computer from the list of DHCP clients in the **Computer Name** drop down menu, or enter the IP address manually of the computer you would like to open the specified port to.

**Schedules:**  
In order to apply a schedule to a Virtual Server Rule, you must first define a schedule on the **Tools>Schedules** page.

This will allow you to open a single port. If you would like to open a range of ports, refer to page 30.

**Virtual Server:** Check the box to enabled the rule.

**Name:** Enter a name for the rule.

**IP Address:** Enter the IP address of the computer on your local network that you want to allow the incoming service to or select a computer from the drop-down menu and click <<.

**Private Port/ Public Port:** Enter the port that you want to open next to Private Port and Public Port. The private and public ports are usually the same. The public port is the port seen from the WAN side, and the private port is the port being used by the application on the computer within your local network.

**Protocol Type:** Select **TCP**, **UDP**, or **ANY**.

**Schedule:** The schedule of time when the Virtual Server Rule will be enabled. The schedule may be set to Always, which will allow the particular service to always be enabled. You can create your own times in the **Tools > Schedules** section.

20 - VIRTUAL SERVER RULES					
			Port	Traffic Type	Schedule
<input checked="" type="checkbox"/>	Name FTP	<< FTP	Public 21	TCP	Always
	IP Address 192.168.0.150	<< PM_test01	Private 21		
<input type="checkbox"/>	Name 	<< Application Name	Public 0	TCP	Always
	IP Address 0.0.0.0	<< Computer Name	Private 0		
<input type="checkbox"/>	Name 	<< Application Name	Public 0	TCP	Always
	IP Address 0.0.0.0	<< Computer Name	Private 0		
<input type="checkbox"/>	Name 	<< Application Name	Public 0	TCP	Always
	IP Address 0.0.0.0	<< Computer Name	Private 0		

# Port Forwarding

This will allow you to open a single port or a range of ports.

**Rule:** Check the box to enable the rule.

**Name:** Enter a name for the rule.

**IP Address:** Enter the IP address of the computer on your local network that you want to allow the incoming service to or select a computer from the drop-down menu and click <<.

**Start Port/End Port:** Enter the port or ports that you want to open. If you want to open one port, enter the same port in both boxes.

**Protocol Type:** Select **TCP**, **UDP**, or **ANY**.

**Schedule:** The schedule of time when the Port Forwarding Rule will be enabled. The schedule may be set to **Always**, which will allow the particular service to always be enabled. You can create your own times in the **Tools > Schedules** section.

**D-Link**

WBR-2310 //

SETUP ADVANCED TOOLS STATUS SUPPORT

**PORT FORWARDING RULES :**

The Port Forwarding option is used to open a single port or a range of ports through your firewall and redirect data through those ports to a single PC on your network.

Save Settings Don't Save Settings

**20- PORT FORWARDING RULES**

	Name	IP Address	Port	Traffic Type	Schedule
<input type="checkbox"/>	<< Application Name >>	<< Computer Name >>	Start 0 End 0	Any	Always
<input type="checkbox"/>	<< Application Name >>	<< Computer Name >>	Start 0 End 0	Any	Always
<input type="checkbox"/>	<< Application Name >>	<< Computer Name >>	Start 0 End 0	Any	Always
<input type="checkbox"/>	<< Application Name >>	<< Computer Name >>	Start 0 End 0	Any	Always

**Helpful Hints..**

**Application Names:** Check the **Application Name** drop down menu for a list of pre-defined applications that you can select from. If you select one of the pre-defined applications, click the arrow button next to the drop down menu to fill out the appropriate fields.

**Computer Names:** You can select your computer from the list of DHCP clients in the **Computer Name** drop down menu, or enter the IP address manually of the computer you would like to open the specified port to.

**Schedules:** In order to apply a schedule to a Port Forwarding Rule, you must first define a schedule on the **Tools > Schedules** page.

**Port Ranges:** This feature allows you to open a range of ports to a computer on your network. To do so, enter the first port in the range you would like to open in the **Start** field and last port of the

# Application Rules

Some applications require multiple connections, such as Internet gaming, video conferencing, Internet telephony and others. These applications have difficulties working through NAT (Network Address Translation). Special Applications makes some of these applications work with the WBR-2310. If you need to run applications that require multiple connections, specify the port normally associated with an application in the “Trigger Port” field, select the protocol type as TCP or UDP, then enter the firewall (public) ports associated with the trigger port to open them for inbound traffic.

The WBR-2310 provides some predefined applications in the table on the bottom of the web page. Select the application you want to use and enable it.

**Name:** Enter a name for the rule.

**Trigger Port:** This is the port used to trigger the application. It can be either a single port or a range of ports.

**Trigger Type:** Select the protocol of the trigger port (TCP, UDP, or ANY).

**Firewall Port:** This is the port number on the WAN side that will be used to access the application. You may define a single port or a range of ports. You can use a comma to add multiple ports or port ranges.

**Port Type:** Select the protocol of the firewall port (TCP, UDP, or ANY).

**Schedule:** The schedule of time when the Application Rule will be enabled. The schedule may be set to Always, which will allow the particular service to always be enabled. You can create your own times in the **Tools > Schedules** section.

**D-Link**

WBR-2310 // SETUP ADVANCED TOOLS STATUS SUPPORT

**APPLICATION RULES :**

The Application Rules option is used to open single or multiple ports in your firewall when the router senses data sent to the Internet on a outgoing "Trigger" port or port range. Special Applications rules apply to all computers on your internal network.

Save Settings Don't Save Settings

**20 - APPLICATION RULES**

		Port	Traffic Type	Schedule
<input type="checkbox"/>	Name Application Name	Trigger Firewall	TCP TCP	Always
<input type="checkbox"/>	Name Application Name	Trigger Firewall	TCP TCP	Always
<input type="checkbox"/>	Name Application Name	Trigger Firewall	TCP TCP	Always
<input type="checkbox"/>	Name Application Name	Trigger Firewall	TCP TCP	Always

**Helpful Hints..**

**Application Names:** Check the **Application Name** drop down menu for a list of pre-defined applications that you can select from. If you select one of the pre-defined applications, click the arrow button next to the drop down menu to fill out the appropriate fields.

**Schedules:** In order to apply a schedule to an Application Rule, you must first define a schedule on the **Tools > Schedules** page.

# Network Filters

Use MAC (Media Access Control) Filters to allow or deny LAN (Local Area Network) computers by their MAC addresses from accessing the Network. You can either manually add a MAC address or select the MAC address from the list of clients that are currently connected to the Broadband Router.

**Configure MAC Filter:** Select **Disable MAC filters**, Turn MAC filtering on and **ALLOW** computers listed to access the network, or Turn MAC filtering on and **DENY** computers listed to access the network.

**MAC Address:** Enter the MAC address you would like to filter. To find the MAC address on a computer, please refer to the Networking Basics section in this manual.

**DHCP Client:** Select a DHCP client from the drop-down menu and click the arrow to copy that MAC Address.

**MAC FILTERING :**

The MAC (Media Access Controller) Address filter option is used to control network access based on the MAC Address of the network adapter. A MAC address is a unique ID assigned by the manufacturer of the network adapter. This feature can be configured to ALLOW or DENY network/Internet access.

Save Settings Don't Save Settings

**20 - MAC FILTERING RULES**

Configure MAC Filtering below:  
Turn MAC Filtering OFF

MAC Address		DHCP Client List	
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR

**Helpful Hints..**

**Mac Filtering:** Create a list of MAC addresses that you would either like to allow or deny access to your network.

**Computer Names:** computers that have obtained an IP address from the router's DHCP server will be in the DHCP Client List. Select a device from the drop down menu and click the arrow to add that device's MAC to the list.

**Clearing an Entry:** Click the CLEAR button to remove the MAC address from the MAC Filtering list.

The example to the left will allow computer **PM\_test01** to access the network and will deny all other computers access.

**20 - MAC FILTERING RULES**

Configure MAC Filtering below:  
Turn MAC Filtering ON and ALLOW computers listed to access the network

MAC Address		DHCP Client List	
00-04-23-2c-51-a3	<<	PM_test01	CLEAR
00-00-00-00-00-00	<<	Computer Name	CLEAR

## Website Filters

URL and domain blocking are used to deny LAN computers from accessing specific web sites by the URL or domain. A URL is a specially formatted text string that defines a location on the Internet. If any part of the URL contains the blocked word, the site will not be accessible and the web page will not display. To use this feature, enter the text string to be blocked and click **Apply**. The text to be blocked will appear in the list. To delete the text, just highlight it and click **Delete**.

**Configure Website Filter:** Select **Turn Website Filtering OFF**, **Turn Website Filtering ON** and **ALLOW** computers access to **ONLY** these sites, or **Turn Website Filtering ON** and **DENY** computers access to **ONLY** these sites.

**Website URL/ Domain:** Enter the keywords or URLs that you want to block (or allow). Any URL with the keyword in it will be blocked.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The 'ADVANCED' tab is selected, and the 'WEBSITE FILTER' option is highlighted in the left sidebar. The main content area is titled 'WEBSITE FILTERING RULES' and contains the following elements:

- WEBSITE FILTERING RULES :** A section with a description: 'The Website Filter option allows you to set-up a list of Websites that the users on your network will either be allowed or denied access to.' Below this are 'Save Settings' and 'Don't Save Settings' buttons.
- 40 - WEBSITE FILTERING RULES**: A section for configuring website filtering. It includes a dropdown menu set to 'Turn Website Filtering OFF' and a 'Clear the list below...' button.
- Table:** A table with two columns for 'Website URL/Domain' and two columns for 'Always' (dropdown menus). The table is currently empty.

On the right side of the interface, there is a 'Helpful Hints..' section with the following text:

**Website Filtering:** Create a list of Websites that you would like the devices on your network to be allowed or denied access to.

**Keywords:** Keywords can be entered in this list in order to block any URL containing the keyword entered.



# Firewall Settings

This section will allow you to setup a DMZ host and to enable VPN passthrough.

If you have a client PC that cannot run Internet applications properly from behind the WBR-2310, then you can set the client up for unrestricted Internet access. It allows a computer to be exposed to the Internet. This feature is useful for gaming purposes. Enter the IP address of the internal computer that will be the DMZ host. Adding a client to the DMZ (Demilitarized Zone) may expose your local network to a variety of security risks, so only use this option as a last resort.

**Enable DMZ Host:** Check this box to enable DMZ.

**IP Address:** Enter the IP address of the computer you would like to open all ports to or select a computer from the drop-down menu and click <<.

**Enable PPTP Passthrough:** Check this box to allow PPTP VPN traffic to pass through the router to your VPN client.

**Enable L2TP Passthrough:** Check this box to allow L2TP VPN traffic to pass through the router to your VPN client.

**Enable IPsec Passthrough:** Check this box to allow IPsec VPN traffic to pass through the router to your VPN client.

**D-Link**

WBR-2310

SETUP ADVANCED TOOLS STATUS SUPPORT

VIRTUAL SERVER  
PORT FORWARDING  
APPLICATION RULES  
NETWORK FILTER  
WEBSITE FILTER  
FIREWALL SETTINGS  
ADVANCED WIRELESS  
ADVANCED NETWORK

**FIREWALL SETTINGS :**

The Web Filter options allows you to set-up a list of allowed Web sites that can be used by multiple users. When Web Filter is enabled, all other Web sites not listed on this page will be blocked.

Save Settings Don't Save Settings

**DMZ HOST :**

The DMZ (Demilitarized Zone) option provides you with an option to set a single computer on your network outside of the router. If you have a computer that cannot run Internet applications successfully from behind the router, then you can place the computer into the DMZ for unrestricted Internet access.

**Note:** Putting a computer in the DMZ may expose that computer to a variety of security risks. Use of this option is only recommended as a last resort.

Enable DMZ Host :

DMZ IP Address : 0.0.0.0 << Computer Name Always

**VPN PASSTHROUGH :**

Enable PPTP Passthrough :

Enable L2TP Passthrough :

Enable IPsec Passthrough :

**Helpful Hints..**

**DMZ:** Only enable the DMZ option as a last resort. If you are having trouble using an application from a computer behind the router, first try opening ports associated with the application in the Virtual Server or Port Forwarding sections.

**VPN Passthrough:** Make sure VPN passthrough is enabled if you are trying to use a VPN client from behind the router.

**Support:** VPN Passthrough will only function if the VPN client being used runs on the standards ports associated with the VPN connection type. If you are having problems getting your VPN client connected from behind the router and these VPN passthrough options are enabled, please contact your network administrator to find out if any nonstandard ports or



# Advanced Wireless Settings

**TX Rate:** Select the basic transfer rates based on the speed of wireless adapters on your wireless network. It is strongly recommended to keep this setting to **Auto**.

**Transmit Power:** Set the transmit power of the antennas.

**Beacon Interval:** Beacons are packets sent by an Access Point to synchronize a wireless network. Specify a value. 100 is the default setting and is recommended.

**RTS Threshold:** This value should remain at its default setting of 2346. If inconsistent data flow is a problem, only a minor modification should be made.

**Fragmentation:** The fragmentation threshold, which is specified in bytes, determines whether packets will be fragmented. Packets exceeding the 2346 byte setting will be fragmented before transmission. 2346 is the default setting.

**DTIM Interval:** A DTIM (Delivery Traffic Indication Message) is a countdown informing clients of the next window for listening to broadcast and multicast messages. The default setting is 1.

**Preamble Type:** Select Short or Long Preamble. The Preamble defines the length of the CRC block (Cyclic Redundancy Check is a common technique for detecting data transmission errors) for communication between the wireless router and the roaming wireless network adapters. Short is the default setting. **Note:** High network traffic areas should use the shorter preamble type.

**CTS Mode:** CTS (Clear To Send) is a function used to minimize collisions among wireless devices on a wireless local area network (LAN). CTS will make sure the wireless network is clear before a wireless client attempts to send wireless data. Enabling CTS will add overhead and may lower wireless through put. **None:** CTS is typically used in a pure 802.11g environment. If CTS is set to “None” in a mixed mode environment populated by 802.11b clients, wireless collisions may occur frequently. **Always:** CTS will always be used to make sure the wireless LAN is clear before sending data. **Auto:** CTS will monitor the wireless network and automatically decide whether to implement CTS based on the amount of traffic and collisions that occurs on the wireless network.

**WMM Function:** WMM is QoS for your wireless network. Enable this option to improve the quality of video and voice applications for your wireless clients.

**D-Link**

WBR-2310 // SETUP ADVANCED TOOLS STATUS SUPPORT

**ADVANCED WIRELESS SETTINGS :**

If you are not familiar with these Advanced Wireless settings, please read the help section before attempting to modify these settings.

Save Settings Don't Save Settings

**ADVANCED WIRELESS SETTINGS :**

TX Rates : Auto

Transmit Power : 100%

Beacon interval : 100 (msec, range:20~1000, default:100)

RTS Threshold : 2346 (range: 256~2346, default:2346)

Fragmentation : 2346 (range: 1500~2346, default:2346, even number only)

DTIM interval : 1 (range: 1~255, default:1)

Preamble Type :  Short Preamble  Long Preamble

CTS Mode :  None  Always  Auto

WMM Function :  Disable  Enable

**Helpful Hints..**

**Advanced Wireless:**  
It is recommended that you leave these options at their default values. Adjusting them could negatively impact the performance of your wireless network.

# Advanced Network Settings

**UPnP Settings:** To use the Universal Plug and Play (UPnP™) feature click on **Enabled**. UPnP provides compatibility with networking equipment, software and peripherals.

**WAN Ping:** Unchecking the box will not allow the WBR-2310 to respond to pings. Blocking the Ping may provide some extra security from hackers. Check the box to allow the WAN port to be “pinged”.

**WAN select to 10/100 Mbps:** You may set the port speed of the WAN port to 10Mbps, 100Mbps, or auto. Some older cable or DSL modems may require you to set the port speed to 10Mbps.

**Gaming Mode:** Gaming mode allows a form of pass-through for certain Internet Games. If you are using Xbox, Playstation2 or a PC, make sure you are using the latest firmware and Gaming Mode is enabled. To utilize Gaming Mode, click the box. If you are not using a Gaming application, it is recommended that you Disable Gaming Mode.

**Multicast streams:** Check the box to allow multicast traffic to pass through the router from the Internet.

The screenshot displays the D-Link WBR-2310 Advanced Network Settings interface. The page is organized into several sections, each with a title and a description, followed by a checkbox to enable or disable the feature. The 'Enable' checkbox is checked for all listed features.

WBR-2310	SETUP	ADVANCED	TOOLS	STATUS	SUPPORT
VIRTUAL SERVER	<b>NETWORK SETTINGS :</b>				<b>Helpful Hints..</b>  <b>WAN Ping Respond:</b> For added security, it is recommended that you disable the <b>WAN Ping Respond</b> option. Ping is often used by malicious Internet users to locate active networks or PCs.  <b>Gaming Mode:</b> Gaming Mode should be used when you are playing games on the Internet from behind the router.  <b>Multicast Streams:</b> If you are having trouble receiving multicast streams from the Internet, make sure the Multicast Stream option is enabled.
PORT FORWARDING	If you are not familiar with these Advanced Network settings, please read the help section before attempting to enable or disable them. <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>				
APPLICATION RULES	<b>UPNP :</b>				
NETWORK FILTER	Universal Plug and Play (UPnP) supports peer-to-peer Plug and Play functionality for network devices.  Enable UPnP : <input checked="" type="checkbox"/>				
WEBSITE FILTER	<b>WAN PING :</b>				
FIREWALL SETTINGS	If you enable this feature, the WAN port of your router will respond to ping requests from the Internet that are sent to the WAN IP Address.  Enable WAN Ping Respond : <input checked="" type="checkbox"/>				
ADVANCED WIRELESS	<b>WAN PORT SPEED :</b>				
ADVANCED NETWORK	<input type="text" value="10/100Mbps Auto"/>				
	<b>GAMING MODE :</b>				
	If you are having difficulties playing some online games - please enable this mode.  Enable GAMING mode : <input checked="" type="checkbox"/>				
	<b>MULTICAST STREAMS :</b>				
	Enable Multicast Streams: <input checked="" type="checkbox"/>				

# Administrator Settings

This page will allow you to change the Administrator and User passwords. You can also enable Remote Management. There are two accounts that can access the management interface through the web browser. The accounts are **admin** and **user**. **Admin** has read/write access while **user** has read-only access. **User** can only view the settings but cannot make any changes. Only the **admin** account has the ability to change both **admin** and **user** account passwords.

**Administrator Login Name:** Enter a new Login Name for the Administrator account.

**Administrator Password:** Enter a new password for the Administrator Login Name. The administrator can make changes to the settings.

**User Login Name:** Enter a new Login Name for the User account.

**User Password:** Enter the new password for the User login. If you login as the User, you can only see the settings, but cannot change them.

**Remote Management:** Remote management allows the WBR-2310 to be configured from the Internet by a web browser. A username and password is still required to access the Web-Management interface. In general, only a member of your network can browse the built-in web pages to perform Administrator tasks. This feature enables you to perform Administrator tasks from the remote (Internet) host.

**IP Address:** The Internet IP address of the computer that has access to the Broadband Router. If you input an asterisk (\*) into this field, then any computer will be able to access the Router. Putting an asterisk (\*) into this field would present a security risk and is not recommended.

**Port:** The port number used to access the WBR-2310.

Example: <http://x.x.x.x:8080> whereas x.x.x.x is the WAN IP address of the WBR-2310 and 8080 is the port used for the Web Management interface.

The screenshot shows the D-Link WBR-2310 web management interface. The top navigation bar includes 'WBR-2310', 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The left sidebar lists menu items: ADMIN, TIME, SYSTEM, FIRMWARE, DDNS, SYSTEM CHECK, SCHEDULES, and LOG SETTINGS. The main content area is titled 'ADMINISTRATOR SETTINGS' and contains the following sections:

- ADMINISTRATOR SETTINGS :** A text block explaining the two accounts: **Admin** (read/write access) and **User** (read-only access). It notes that only the **admin** account can change passwords. Below this text are 'Save Settings' and 'Don't Save Settings' buttons.
- ADMINISTRATOR (THE DEFAULT LOGIN NAME IS "ADMIN") :** Fields for 'Login name', 'New Password', and 'Confirm Password'.
- USER (THE DEFAULT LOGIN NAME IS "USER") :** Fields for 'Login name', 'New Password', and 'Confirm Password'.
- REMOTE MANAGEMENT :** An 'Enable Remote Management' checkbox, an 'IP Address' field (containing an asterisk), and a 'Port' dropdown menu (set to 8080).

On the right side of the interface, there is a 'Helpful Hints..' section with detailed information about the **Administrator Settings**, **Admin password**, and **User Password**.

# Time Settings

**Time Zone:** Select the Time Zone from the drop-down menu.

**Daylight Saving:** To select Daylight Saving time manually, select enabled or disabled, and enter a start date and an end date for daylight saving time.

**Automatic:** NTP is short for Network Time Protocol. NTP synchronizes computer clock times in a network of computers. This field is optional.

**Manual:** To manually input the time, enter the values in these fields for the Year, Month, Day, Hour, Minute, and Second. Click Set Time. You can also click Copy Your Computer's Time Settings.

The screenshot shows the D-Link WBR-2310 web interface for Time Configuration. The interface is divided into several sections:

- TIME :** Contains the "Time Configuration" section with a description: "The Time Configuration option allows you to configure, update, and maintain the correct time on the internal system clock. From this section you can set the time zone that you are in and set the NTP (Network Time Protocol) Server. Daylight Saving can also be configured to adjust the time when needed." Below this are "Save Settings" and "Don't Save Settings" buttons.
- TIME CONFIGURATION :** Shows the current time as "Apr/01/2002 00:50:57". The Time Zone is set to "(GMT-08:00) Pacific Time (US & Canada)". The Interval is set to "1 hrs". There is a checkbox for "Enable Daylight Saving" which is currently unchecked. Below this are fields for DST Start and DST End, each with dropdowns for Month, Week, Day of Week, and Time.
- AUTOMATIC TIME CONFIGURATION :** Includes a checkbox for "Enable NTP server" (unchecked) and a field for "NTP Server Used" with a "Select NTP Server" button.
- SET THE DATE AND TIME MANUALLY :** Shows the "Current Gateway Time" with dropdowns for Year (2002), Month (Apr), Day (01), Hour (00), Minute (50), Second (57), and AM/PM (AM). A "Copy Your Computer's Time Settings" button is located at the bottom.

On the right side of the interface, there is a "Helpful Hints.." section with the following text:

**System Time**  
The "system time" setting is used by the unit for synchronizing scheduling services and system logging activities. You will need to set the time zone corresponding to your location. The time can be set manually or the device can connect to a NTP (Network Time Protocol) server to retrieve the time. You may also set Daylight Saving dates and the system time will automatically adjust on those dates.

**Automatic** – Enter the NTP server which you would like the WBR-2310 to synchronize its time with. Also, select the interval at which the WBR-2310 will communicate with the specified NTP server.

**Manual** – Select this option if you would like to specify the time manually. You must specify the Year, Month, Day, Hour, Minute, and Second, or you can click the Computer Clock button to copy the system time from the computer being used to access the management interface.

**Time Zone** – Select the Time Zone for the region you are in.

**Daylight Saving** – If the region you are in observes Daylight Savings Time, enable this option and specify the Starting and Ending Month and Week for this time of the year.

# System Settings

**Save Settings to Local Hard Drive:** Use this option to save the current router configuration settings to a file on the hard disk of the computer you are using. First, click the Save button. You will then see a file dialog, where you can select a location and file name for the settings.

**Load Settings from Local Hard Drive:** Use this option to load previously saved router configuration settings. First, use the Browse control to find a previously save file of configuration settings. Then, click the Load button to transfer those settings to the router.

**Restore to Factory Default Settings:** This option will restore all configuration settings back to the settings that were in effect at the time the router was shipped from the factory. Any settings that have not been saved will be lost, including any rules that you have created. If you want to save the current router configuration settings, use the Save button above.

**D-Link**

WBR-2310 // SETUP ADVANCED **TOOLS** STATUS SUPPORT

**SYSTEM SETTINGS :**  
The current system settings can be saved as a file onto the local hard drive. The saved file or any other saved setting file created by device can be uploaded into the unit.

**SYSTEM SETTINGS :**

Save Settings To Local Hard Drive :

Load Settings From Local Hard Drive :

Restore To Factory Default Settings :

Reboots the WBR-2310 :

**Helpful Hints..**  
**System Settings**  
The current system settings can be saved as a file onto the local hard drive. The saved file or any other saved setting file created by device can be uploaded into the unit. To reload a system settings file, click on **Browse** to search the local hard drive for the file to be used. The device can also be reset back to factory default settings by clicking on **Restore**. Use the restore feature only if necessary.

# Update Firmware

You can upgrade the firmware of the Router here. Make sure the firmware you want to use is on the local hard drive of the computer. Click on **Browse** to locate the firmware file to be used for the update. Please check the D-Link support site for firmware updates at <http://support.dlink.com>. You can download firmware upgrades to your hard drive from the D-Link support site.

**Firmware Upgrade:** Click on the link in this screen to find out if there is an updated firmware; if so, download the new firmware to your hard drive.

**Browse:** After you have downloaded the new firmware, click Browse in this window to locate the firmware update on your hard drive. Click **Save Settings** to complete the firmware upgrade.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'D-Link' and tabs for 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The left sidebar lists menu items: ADMIN, TIME, SYSTEM, FIRMWARE, DDNS, SYSTEM CHECK, SCHEDULES, and LOG SETTINGS. The main content area is titled 'FIRMWARE UPGRADE :'. It contains the following text: 'There may be new firmware for your WBR-2310 to improve functionality and performance. [Click here to check for an upgrade on our support site.](#) To upgrade the firmware, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Apply button below to start the firmware upgrade.' Below this text are two buttons: 'Save Settings' and 'Don't Save Settings'. Underneath is a section titled 'CURRENT FIRMWARE INFO :'. It displays 'Current Firmware Version 1.00' and 'Firmware Date Dec 6, 2005'. There is a text input field followed by a 'Browse...' button. On the right side of the interface, there is a 'Helpful Hints..' section with the following text: 'Firmware Upgrade You can upgrade the firmware of the device using this tool. Make sure that the firmware you want to use is saved on the local hard drive of the computer. Click on **Browse** to search the local hard drive for the firmware to be used for the update. Upgrading the firmware will not change any of your system settings but it is recommended that you save your system settings before doing a firmware upgrade. Please check the D-Link support site for



## DDNS

**DDNS:** Dynamic Domain Name System is a method of keeping a domain name linked to a changing IP Address. Check the box to enable DDNS.

**Server Address:** Choose your DDNS provider from the drop down menu.

**Host Name:** Enter the Host Name that you registered with your DDNS service provider.

**Username:** Enter the Username for your DDNS account.

**Password:** Enter the Password for your DDNS account.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes 'WBR-2310', 'SETUP', 'ADVANCED', 'TOOLS', 'STATUS', and 'SUPPORT'. The left sidebar lists 'ADMIN', 'TIME', 'SYSTEM', 'FIRMWARE', 'DDNS', 'SYSTEM CHECK', 'SCHEDULES', and 'LOG SETTINGS'. The main content area is titled 'DYNAMIC DNS' and contains the following text:

Dynamic DNS (Domain Name Service) is a method of keeping a domain name linked to a changing (dynamic) IP address. With most Cable and DSL connections, you are assigned a dynamic IP address and that address is used only for the duration of that specific connection.

With the WBR-2310, you can setup your DDNS service and the WBR-2310 will automatically update your DDNS server every time it receives a new WAN IP address.

Buttons: Save Settings, Don't Save Settings

**DDNS SETTINGS :**

Enable DDNS :

Server Address : DynDns.org (dropdown menu)

Host Name :

Username :

Password :

**Helpful Hints..**

**Dynamic DNS**  
Dynamic DNS (Domain Name Service) is a method of keeping a domain name linked to a changing (dynamic) IP address. With most Cable and DSL connections, you are assigned a dynamic IP address and that address is used only for the duration of that specific connection. With the WBR-2310, you can setup your DDNS service and the WBR-2310 will automatically update your DDNS server every time it receives a new WAN IP address.

**Server Address –**  
Choose your DDNS provider from the drop down menu.



# System Test

**Virtual Cable Tester (VCT) Info:** VCT is an advanced feature that integrates a LAN cable tester on every Ethernet port on the router. Through the graphical user interface (GUI), VCT can be used to remotely diagnose and report cable faults such as opens, shorts, swaps, and impedance mismatch. This feature significantly reduces service calls and returns by allowing users to easily troubleshoot their cable connections.

**Ping Test:** The Ping Test is used to send Ping packets to test if a computer is on the Internet. Enter the IP Address that you wish to Ping, and click **Ping**.

**D-Link**

WBR-2310

SETUP    ADVANCED    **TOOLS**    STATUS    SUPPORT

**FAST ETHERNET VIRTUAL CABLE TESTER (VCT) :**  
Cable Test is an advanced feature that integrates a LAN cable tester on every Ethernet port on the router.

**VCT INFO :**

Ports	Link Status		
WAN		Disconnected	<a href="#">More Info</a>
LAN1		Disconnected	<a href="#">More Info</a>
LAN2		100Mbps FULL Duplex	<a href="#">More Info</a>
LAN3		Disconnected	<a href="#">More Info</a>
LAN4		Disconnected	<a href="#">More Info</a>

**PING TEST :**

Ping Test is used to send "Ping" packets to test if a computer is on the Internet.

Host Name or IP Address :

**PING RESULT:**

**Helpful Hints..**  
Cable Test is an advanced feature that integrates a LAN cable tester on every Ethernet port on the router. Through the graphical user interface (GUI), Cable Test can be used to remotely diagnose and report cable faults such as opens, shorts, swaps, and impedance mismatch. This feature significantly reduces service calls and returns by allowing users to easily troubleshoot their cable connections.

# Schedules

**Name:** Enter a name for your new schedule.

**Days:** Select a day, a range of days, or All Week to include every day.

**Time:** Check **All Day - 24hrs** or enter a start and end time for your schedule.

**D-Link**

WBR-2310 //

SETUP    ADVANCED    **TOOLS**    STATUS    SUPPORT

ADMIN  
TIME  
SYSTEM  
FIRMWARE  
DDNS  
SYSTEM CHECK  
**SCHEDULES**  
LOG SETTINGS

Helpful Hints..

**SCHEDULES :**

The Schedule configuration option is used to manage schedule rules for various firewall and parental control features.

Save Settings    Don't Save Settings

**ADD SCHEDULE RULE :**

Name :

Day(s) :  All Week  Select Day(s)  
 to

All Day - 24 hrs :

Start Time :  :  AM (hour:minute, 12 hour time)

End Time :  :  AM (hour:minute, 12 hour time)

**SCHEDULE RULES LIST :**

Name :	Day(s) :	Time Frame :

# Log Settings

The Broadband Router keeps a running log of events and activities occurring on the Router. If the device is rebooted, the logs are automatically cleared.

**SMTP Server/IP Address:** The address of the SMTP server that will be used to send the logs.

**Email Address:** The email address to which the logs will be sent. Click on **Send Mail Now** to send the email.

**Save Log File to Local Hard Drive:** Click to save the log to your hard drive.

**Log Type:** Check the type of alert you want logged.

The screenshot shows the D-Link WBR-2310 Web Management Interface. The top navigation bar includes tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The left sidebar lists various configuration options, with LOG SETTINGS selected. The main content area is titled 'LOG SETTINGS' and contains the following sections:

- LOG SETTINGS :** A message states 'Logs can be saved by sending it to an admin email address.' Below this are two buttons: 'Save Settings' and 'Don't Save Settings'.
- LOG FILES :** This section contains several input fields and checkboxes:
  - 'SMTP Server / IP Address' with an empty text input field.
  - 'Email Address' with an empty text input field and a 'Send Mail Now' button.
  - 'Save Log File To Local Hard Drive' with a 'Save' button.
  - 'Log Type' with four checkboxes:
    - System Activity
    - Debug Information
    - Attacks
    - Dropped Packets
    - Notice

On the right side of the interface, there is a 'Helpful Hints..' section with the following text:

**Log Settings**  
Not only does the device display the logs of activities and events, it can be setup to send these logs to another location. The logs can be sent via email to a specific email account.

**SMTP Server / IP Address** - The address of the SMTP (Simple Mail Transfer Protocol) server that will be used to send the logs.

**Email Address** - The email address the logs will be sent to. Click on Email Log Now to send the email.

**Save** - Click this button to save the log entries to a text file.

**Next** - Moves forward one log page.

**Clear** - Clears the logs completely.

**Log Type** - Select the type of information you would like the WBR-2310 to log.

## Device Information

This page displays the current information for the WBR-2310. It will display the LAN, WAN, and Wireless information.

If your WAN connection is set up for a Dynamic IP address then a **Release** button and a **Renew** button will be displayed. Use **Release** to disconnect from your ISP and use **Renew** to connect to your ISP.

If your WAN connection is set up for PPPoE, a **Connect** button and a **Disconnect** button will be displayed. Use **Disconnect** to drop the PPPoE connection and use **Connect** to establish the PPPoE connection.

**LAN:** Displays the MAC address and the private (local) IP settings for the router.

**WAN:** Displays the MAC address and the public IP settings for the router.

**Wireless:** Displays wireless settings such as SSID, Channel, and Encryption level.

The screenshot shows the D-Link WBR-2310 web interface. The top navigation bar includes tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The left sidebar contains links for DEVICE INFO, LOG, STATS, and WIRELESS. The main content area is titled "DEVICE INFORMATION" and displays the following details:

- Device Information:** All of your Internet and network connection details are displayed on this page. The firmware version is also displayed here.
  - Firmware Version: 1.00 , Dec 6, 2005
- LAN :**
  - MAC Address : 00-10-ab-cd-ee-03
  - IP Address : 192.168.0.1
  - Subnt Mask : 255.255.255.0
  - DHCP Server : Enabled
- WAN:**
  - MAC Address : 00-10-ab-cd-ee-04
  - Connection : DHCP Client Disconnected
  - Buttons: DHCP Release, DHCP Renew
  - IP Address : 0.0.0.0
  - Subnt Mask : 0.0.0.0
  - Default Gateway : 0.0.0.0
  - DNS :
- WIRELESS 802.11G :**
  - SSID : dlink
  - Channel : 6
  - Encryption : Disabled

On the right side, there is a "Helpful Hints.." section with sub-sections for Device Information, LAN (Local Area Network), and WAN (Wide Area Network), providing additional context for the displayed settings.

# Log

**First Page:** View the first page of the log.

**Last Page:** View the last page of the log.

**Previous:** View the previous page.

**Next:** View the next page.

**Clear:** Clear the log.

**D-Link**

WBR-2310 //

SETUP ADVANCED TOOLS STATUS SUPPORT

DEVICES INFO

LOG

STATS

WIRELESS

**VIEW LOG :**

View Log displays the activities occurring on the WBR-2310.

**LOG FILES :**

First Page Last Page Previous Next Clear

Page 1 of 20

Time	Message	Source	Destination	Note
Apr/01/2002 01:04:49	DHCP Discover no response			
Apr/01/2002 01:04:49	DHCP Discover			
Apr/01/2002 01:04:33	DHCP Discover			
Apr/01/2002 01:04:24	DHCP Discover			
Apr/01/2002 01:04:19	DHCP Discover			
Apr/01/2002 01:04:17	DHCP Discover			
Apr/01/2002 01:04:15	DHCP Discover no response			
Apr/01/2002 01:04:15	DHCP Discover			
Apr/01/2002 01:03:58	DHCP Discover			
Apr/01/2002 01:03:50	DHCP Discover			

**Helpful Hints..**

**Log**  
The WBR-2310 keeps a running log of events and activities occurring on it at all times. The log will display up to 200 recent logs. Newer log activities will overwrite the older logs. You can save the log files or have them emailed to you by clicking on the Log Settings button. This is recommended as the logs are cleared every time the router is rebooted.

**First Page** - Click this button to go to the first page of the log.  
**Last Page** - Click this button to go to the last page of the log.  
**Previous** - Moves back one log page.  
**Next** - Moves forward one log page.  
**Clear** - Clears the logs completely.  
**Log Settings** - Brings up the page to configure what information is logged and also how you would like to

## Stats

The screen below displays the Traffic Statistics. Here you can view the amount of packets that pass through the WBR-2310 on both the WAN and the LAN ports. The traffic counter will reset if the device is rebooted.

	Receive	Transmit
WAN	0 Packets	594 Packets
LAN	3502 Packets	4510 Packets
WIRELESS 11g	0 Packets	2813 Packets

**Helpful Hints..**  
**Stats**  
 The WBR-2310 keeps statistic of the data traffic that it handles. You are able to view the amount of packets that the router has Received and Transmitted on the WAN, LAN, and Wireless interfaces.  
**Refresh**—Click this button to update the counters.  
**Reset**—Click this button to clear the counters. The traffic counter will reset when the device is rebooted.

## Wireless

The wireless client table displays a list of current connected wireless clients. This table also displays the connection time and MAC address of the connected wireless client.

Connected Time	MAC Address	Mode
----------------	-------------	------

**Helpful Hints..**  
**Wireless**  
 Use this page in order to view how many wireless clients have associated with the WBR-2310. This page shows the MAC address of each associated client, how long they have been associated, and the mode they are connecting in (802.11b or 802.11g).

# Support

The screenshot displays the D-Link WBR-2310 web interface. At the top, the D-Link logo is visible on an orange background. Below the logo is a navigation bar with tabs for SETUP, ADVANCED, TOOLS, STATUS, and SUPPORT. The SUPPORT tab is selected. On the left side, there is a 'MENU' sidebar. The main content area shows the 'SUPPORT MENU' with the following categories and links:

- Setup**
  - [Internet](#)
  - [Wireless Settings](#)
  - [Network settings](#)
- Advanced**
  - [Virtual Server](#)
  - [Port Forwarding](#)
  - [Application Rules](#)
  - [Network Filter](#)
  - [Website Filter](#)
  - [Firewall Settings](#)
  - [Advanced Wireless](#)
  - [Advanced Network](#)
- Tools**
  - [Admin](#)
  - [Time](#)
  - [System](#)
  - [Firmware Upgrade](#)
  - [DDNS](#)
  - [System Check](#)
  - [Schedules](#)
  - [Log settings](#)
- Status**
  - [Device Info](#)
  - [Log](#)
  - [Stats](#)
  - [Wireless](#)

At the bottom of the support menu, there is a link for [FAQs](#).



# Wireless Security

This section will show you the different levels of security you can use to protect your data from intruders. The WBR-2310 offers the following types of security:

- WPA2 (Wi-Fi Protected Access 2)
- WPA (Wi-Fi Protected Access)
- WEP (Wired Equivalent Privacy)
- WPA2-PSK (Pre-Shared Key)
- WPA-PSK (Pre-Shared Key)

## What is WEP?

WEP stands for *Wired Equivalent Privacy*. It is based on the IEEE 802.11 standard and uses the RC4 encryption algorithm. WEP provides security by encrypting data over your wireless network so that it is protected as it is transmitted from one wireless device to another.

To gain access to a WEP network, you must know the key. The key is a string of characters that you create. When using WEP, you must determine the level of encryption. The type of encryption determines the key length. 128-bit encryption requires a longer key than 64-bit encryption. Keys are defined by entering in a string in HEX (hexadecimal - using characters 0-9, A-F) or ASCII (American Standard Code for Information Interchange – alphanumeric characters) format. ASCII format is provided so you can enter a string that is easier to remember. The ASCII string is converted to HEX for use over the network. Four keys can be defined so that you can change keys easily.

## What is WPA?

WPA, or Wi-Fi Protected Access, is a Wi-Fi standard that was designed to improve the security features of WEP (Wired Equivalent Privacy).

The 2 major improvements over WEP:

- Improved data encryption through the Temporal Key Integrity Protocol (TKIP). TKIP scrambles the keys using a hashing algorithm and, by adding an integrity-checking feature, ensures that the keys haven't been tampered with. WPA2 is based on 802.11i and uses Advanced Encryption Standard (AES) instead of TKIP.
- User authentication, which is generally missing in WEP, through the extensible authentication protocol (EAP). WEP regulates access to a wireless network based on a computer's hardware-specific MAC address, which is relatively simple to be sniffed out and stolen. EAP is built on a more secure public-key encryption system to ensure that only authorized network users can access the network.

WPA-PSK/WPA2-PSK uses a passphrase or key to authenticate your wireless connection. The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?\*&\_) and spaces. This key must be the exact same key entered on your wireless router or access point.

WPA/WPA2 incorporates user authentication through the Extensible Authentication Protocol (EAP). EAP is built on a more secure public key encryption system to ensure that only authorized network users can access the network.

# Configure WEP

It is recommended to enable encryption on your wireless router before your wireless network adapters. Please establish wireless connectivity before enabling encryption. Your wireless signal may degrade when enabling encryption due to the added overhead.

1. Log into the web-based configuration by opening a web browser and entering the IP address of the router (192.168.0.1). Click on **Wireless Settings** on the left side.
2. Next to *Security Mode*, select **Enable WEP Security**.
3. Next to *Authentication*, select **Shared Key**.
4. Select either **64-bit** or **128-bit** encryption from the drop-down menu next to *WEP Encryption*.
5. Next to *Key Type*, select either **Hex** or **ASCII**.  
Hex (recommended) - Letters A-F and numbers 0-9 are valid.  
ASCII - All numbers and letters are valid.
6. Next to *Key 1*, enter a WEP key that you create. Make sure you enter this key exactly on all your wireless devices. You may enter up to 4 different keys.
7. Click **Save Settings** to save your settings. If you are configuring the router with a wireless adapter, you will lose connectivity until you enable WEP on your adapter and enter the same WEP key as you did on the router.

**WIRELESS SECURITY MODE :**

Security Mode :

**WEP :**

WEP is the wireless encryption standard. To use it you must enter the same key(s) into the router and the wireless stations. For 64 bit keys you must enter 10 hex digits into each key box. For 128 bit keys you must enter 26 hex digits into each key box. A hex digit is either a number from 0 to 9 or a letter from A to F. For the most secure use of WEP set the authentication type to "Shared Key" when WEP is enabled.

You may also enter any text string into a WEP key box, in which case it will be converted into a hexadecimal key using the ASCII values of the characters. A maximum of 5 text characters can be entered for 64 bit keys, and a maximum of 13 characters for 128 bit keys.

Authentication :

WEP Encryption :

Key Type :

Default WEP Key :

WEP Key 1 :

WEP Key 2 :

WEP Key 3 :

WEP Key 4 :

# Configure WPA/WPA2 Personal

It is recommended to enable encryption on your wireless router before your wireless network adapters. Please establish wireless connectivity before enabling encryption. Your wireless signal may degrade when enabling encryption due to the added overhead.

1. Log into the web-based configuration by opening a web browser and entering the IP address of the router (192.168.0.1). Click on **Wireless Settings** on the left side.
2. Next to *Security Mode*, select **Enable WPA-Personal Security** or **Enable WPA2-Personal Security**.
3. Next to *Cipher Mode*, select **TKIP**, **AES**, or **Auto**.
4. Next to *PSK/EAP*, select **PSK**.
5. Next to *Passphrase*, enter a key (passphrase). The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?\*&\_) and spaces. Make sure you enter this key exactly the same on all other wireless clients.
6. Enter the passphrase again next to *Confirmed Passphrase*.
7. Click **Save Settings** to save your settings. If you are configuring the router with a wireless adapter, you will lose connectivity until you enable WPA-PSK (or WPA2-PSK) on your adapter and enter the same passphrase as you did on the router.

The screenshot shows a web-based configuration interface for wireless security. At the top, there is a section titled "WIRELESS SECURITY MODE :". Below this, the "Security Mode" is set to "Enable WPA Wireless Security (enhanced)". Below that, there is a section titled "WPA :". Under "WPA :", there is a note: "WPA requires stations to use high grade encryption and authentication." Below the note, there are three fields: "Cipher Type" is set to "TKIP", "Personal / Enterprise" is set to "Personal", and "Passphrase" and "Confirmed Passphrase" are empty text input fields.

# Configure WPA/WPA2 (RADIUS)

It is recommended to enable encryption on your wireless router before your wireless network adapters. Please establish wireless connectivity before enabling encryption. Your wireless signal may degrade when enabling encryption due to the added overhead.

1. Log into the web-based configuration by opening a web browser and entering the IP address of the router (192.168.0.1). Click on **Wireless Settings** on the left side.
2. Next to *Security Mode*, select **Enable WPA-Personal Security** or **Enable WPA2-Personal Security**.
3. Next to *Cipher Mode*, select **TKIP**, **AES**, or **Auto**.
4. Next to *PSK/EAP*, select **EAP**.
5. Next to *RADIUS Server 1* enter the IP Address of your RADIUS server.
6. Next to *Port*, enter the port you are using with your RADIUS server. 1812 is the default port.
7. Next to *Shared Secret*, enter the security key.
8. If you have a secondary RADIUS server, enter its IP address, port, and secret key.
9. Click **Apply Settings** to save your settings.

**WIRELESS SECURITY MODE :**

Security Mode :

**WPA :**

WPA requires stations to use high grade encryption and authentication.

Cipher Type :

Personal / Enterprise :

802.1X

RADIUS Server 1 : IP	<input type="text" value="0.0.0.0"/>	
Port	<input type="text" value="1812"/>	
Shared Secret	<input type="text"/>	
RADIUS Server 2 : IP	<input type="text" value="0.0.0.0"/>	
Port	<input type="text" value="0"/>	
Shared Secret	<input type="text"/>	

# Connect to a Wireless Network Using Windows Vista®

Windows Vista® users may use the built-in wireless utility. If you are using another company's utility or Windows® 2000, please refer to the user manual of your wireless adapter for help with connecting to a wireless network. Most utilities will have a "site survey" option similar to the Windows Vista® utility as seen below.

If you receive the **Wireless Networks Detected** bubble, click on the center of the bubble to access the utility.


or

Right-click on the wireless computer icon in your system tray (lower-right corner next to the time). Select **Connect to a network**.



The utility will display any available wireless networks in your area. Click on a network (displayed using the SSID) and click the **Connect** button.


If you get a good signal but cannot access the Internet, check your TCP/IP settings for your wireless adapter. Refer to the **Networking Basics** section in this manual for more information.

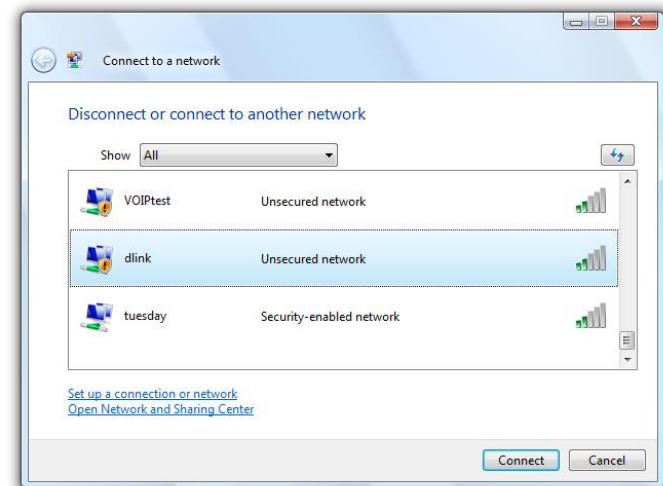


## Configure Wireless Security

It is recommended to enable wireless security (WPA/WPA2) on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the security key or passphrase being used.

1. Open the Windows Vista® Wireless Utility by right-clicking on the wireless computer icon in your system tray (lower right corner of screen). Select **Connect to a network**.

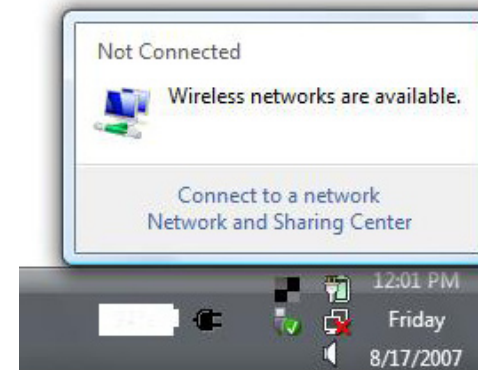

2. Highlight the wireless network (SSID) you would like to connect to and click **Connect**.

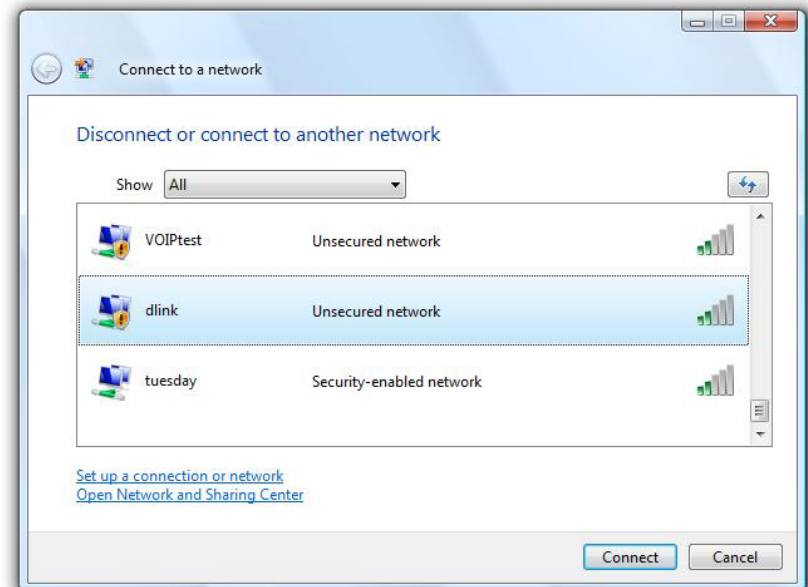



3. Enter the same security key or passphrase that is on your router and click **Connect**.

It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the security settings are correct. The key or passphrase must be exactly the same as on the wireless router.



# Connect to a Wireless Network Using Windows® XP

Windows® XP users may use the built-in wireless utility (Zero Configuration Utility). The following instructions are for Service Pack 2 users. If you are using another company's utility or Windows® 2000, please refer to the user manual of your wireless adapter for help with connecting to a wireless network. Most utilities will have a "site survey" option similar to the Windows® XP utility as seen below.




If you receive the **Wireless Networks Detected** bubble, click on the center of the bubble to access the utility.

or

Right-click on the wireless computer icon in your system tray (lower-right corner next to the time). Select **View Available Wireless Networks**.

The utility will display any available wireless networks in your area. Click on a network (displayed using the SSID) and click the **Connect** button.


If you get a good signal but cannot access the Internet, check you TCP/IP settings for your wireless adapter. Refer to the **Networking Basics** section in this manual for more information.

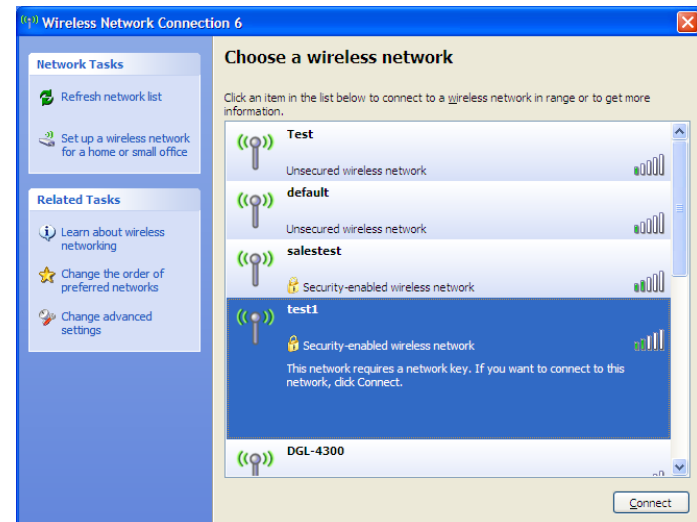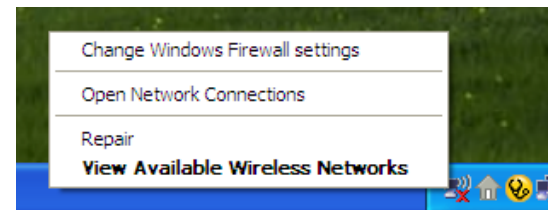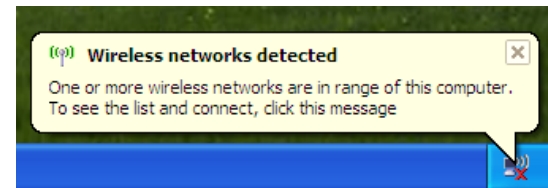


## Configure WEP

It is recommended to enable WEP on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the WEP key being used.

1. Open the Windows® XP Wireless Utility by right-clicking on the wireless computer icon in your system tray (lower-right corner of screen). Select **View Available Wireless Networks**.

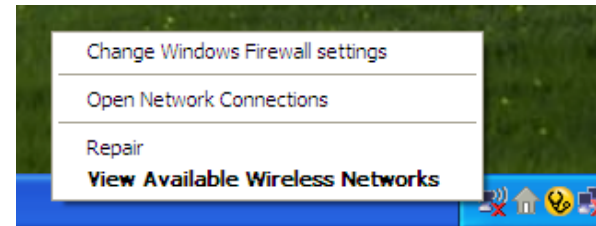


2. Highlight the wireless network (SSID) you would like to connect to and click **Connect**.

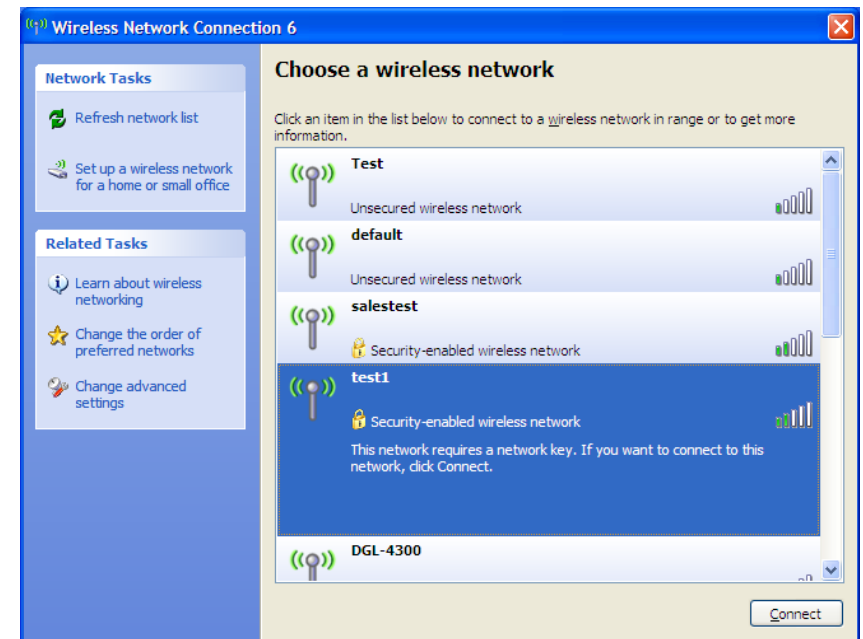

3. The **Wireless Network Connection** box will appear. Enter the same WEP key that is on your router and click **Connect**.


It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the WEP settings are correct. The WEP key must be exactly the same as on the wireless router.

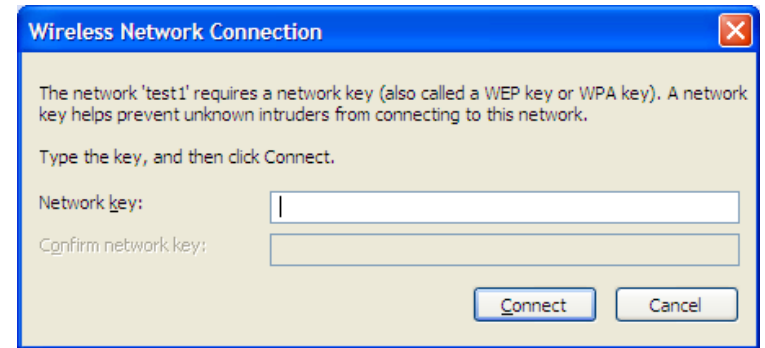


## Configure WPA/WPA2

It is recommended to enable WEP on your wireless router or access point before configuring your wireless adapter. If you are joining an existing network, you will need to know the WEP key being used.

1. Open the Windows® XP Wireless Utility by right-clicking on the wireless computer icon in your system tray (lower-right corner of screen). Select **View Available Wireless Networks**.

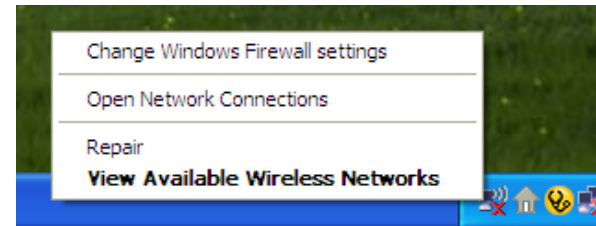


2. Highlight the wireless network (SSID) you would like to connect to and click **Connect**.

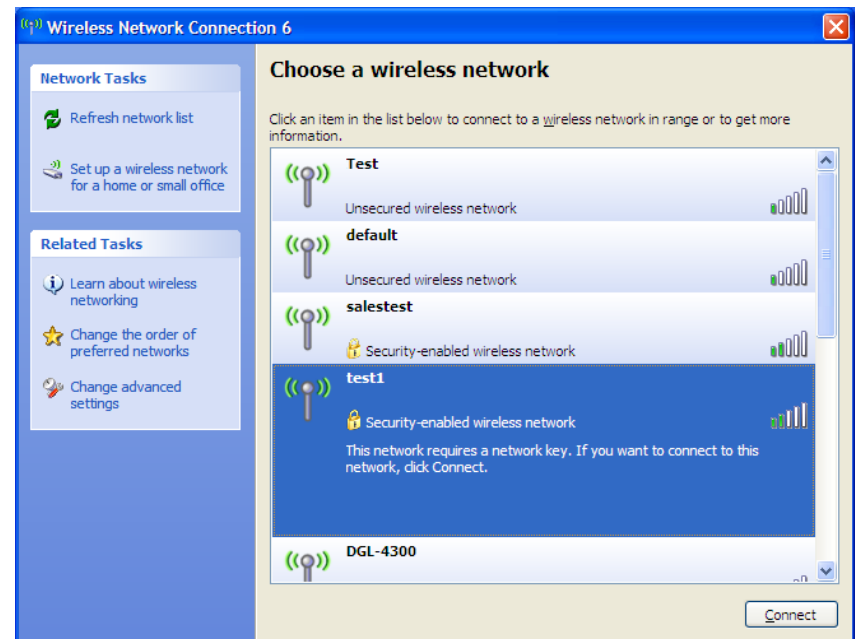

3. The **Wireless Network Connection** box will appear. Enter the WPA-PSK passphrase and click **Connect**.

It may take 20-30 seconds to connect to the wireless network. If the connection fails, please verify that the WPA-PSK settings are correct. The WPA-PSK passphrase must be exactly the same as on the wireless router.

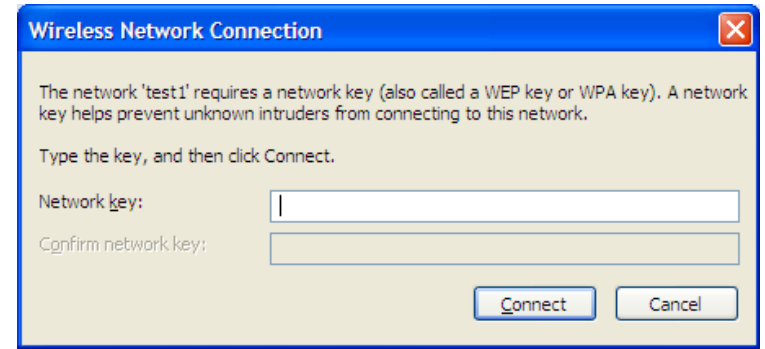

# Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the WBR-2310. Read the following descriptions if you are having problems. (The examples below are illustrated in Windows® XP. If you have a different operating system, the screenshots on your computer will look similar to the following examples.)

## 1. Why can't I access the web-based configuration utility?

When entering the IP address of the D-Link router (192.168.0.1 for example), you are not connecting to a website on the Internet or have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- Make sure you have an updated Java-enabled web browser. We recommend the following:
  - Internet Explorer 6.0 or higher
  - Netscape 8 or higher
  - Mozilla 1.7.12 (5.0) or higher
  - Opera 8.5 or higher
  - Safari 1.2 or higher (with Java 1.3.1 or higher)
  - Camino 0.8.4 or higher
  - Firefox 1.5 or higher
  - Chrome 1.0 or higher
- Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable or connect to a different port on the device if possible. If the computer is turned off, the link light may not be on.
- Disable any internet security software running on the computer. Software firewalls such as Zone Alarm, Black Ice, Sygate, Norton Personal Firewall, and Windows® XP firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on disabling or configuring it.



- Configure your Internet settings:
  - Go to **Start > Settings > Control Panel**. Double-click the **Internet Options** Icon. From the **Security** tab, click the button to restore the settings to their defaults.
  - Click the **Connection** tab and set the dial-up option to Never Dial a Connection. Click the LAN Settings button. Make sure nothing is checked. Click **OK**.
  - Go to the **Advanced** tab and click the button to restore these settings to their defaults. Click **OK** three times.
  - Close your web browser (if open) and open it.
- Access the web management. Open your web browser and enter the IP address of your D-Link router in the address bar. This should open the login page for your the web management.
- If you still cannot access the configuration, unplug the power to the router for 10 seconds and plug back in. Wait about 30 seconds and try accessing the configuration. If you have multiple computers, try connecting using a different computer.

## 2. What can I do if I forgot my password?

If you forgot your password, you must reset your router. Unfortunately this process will change all your settings back to the factory defaults.

To reset the router, locate the reset button (hole) on the rear panel of the unit. With the router powered on, use a paperclip to hold the button down for 10 seconds. Release the button and the router will go through its reboot process. Wait about 30 seconds to access the router. The default IP address is 192.168.0.1. When logging in, the username is **admin** and leave the password box empty.

### 3. Why can't I connect to certain sites or send and receive emails when connecting through my router?

If you are having a problem sending or receiving email, or connecting to secure sites such as eBay, banking sites, and Hotmail, we suggest lowering the MTU in increments of ten (Ex. 1492, 1482, 1472, etc).

**Note: AOL DSL+ users must use MTU of 1400.**

To find the proper MTU Size, you'll have to do a special ping of the destination you're trying to go to. A destination could be another computer, or a URL.

- Click on **Start** and then click **Run**.
- Windows® 95, 98, and Me users type in **command** (Windows® NT, 2000, and XP users type in **cmd**) and press **Enter** (or click **OK**).
- Once the window opens, you'll need to do a special ping. Use the following syntax:

**ping [url] [-f] [-l] [MTU value]**

Example: **ping yahoo.com -f -l 1472**

```
C:\>ping yahoo.com -f -l 1482
Pinging yahoo.com [66.94.234.13] with 1482 bytes of data:
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.
Packet needs to be fragmented but DF set.

Ping statistics for 66.94.234.13:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping yahoo.com -f -l 1472
Pinging yahoo.com [66.94.234.13] with 1472 bytes of data:
Reply from 66.94.234.13: bytes=1472 time=93ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=109ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=125ms TTL=52
Reply from 66.94.234.13: bytes=1472 time=203ms TTL=52

Ping statistics for 66.94.234.13:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 93ms, Maximum = 203ms, Average = 132ms

C:\>
```

You should start at 1472 and work your way down by 10 each time. Once you get a reply, go up by 2 until you get a fragmented packet. Take that value and add 28 to the value to account for the various TCP/IP headers. For example, lets say that 1452 was the proper value, the actual MTU size would be 1480, which is the optimum for the network we're working with (1452+28=1480).

Once you find your MTU, you can now configure your router with the proper MTU size.

To change the MTU rate on your router follow the steps below:

- Open your browser, enter the IP address of your router (192.168.0.1) and click **OK**.
- Enter your username (admin) and password (blank by default). Click **OK** to enter the web configuration page for the device.
- Click on **Setup** and then click **Manual Configure**.
- To change the MTU enter the number in the MTU field and click **Save Settings** to save your settings.
- Test your email. If changing the MTU does not resolve the problem, continue changing the MTU in increments of ten.

# Frequently Asked Questions

## 1. How do I reset my router back to the factory default settings?

**Step 1** With the router powered on, place a paper clip into the hole on the back on the unit labeled **Reset**.

**Step 2** Hold the paper clip down for 10 seconds and release.

**Note: Do not repower unit during this procedure.**

**Step 3** The unit will reboot on its own. Once the WLAN light stops blinking, the unit is reset.

Resetting the router does not reset the firmware to an earlier version. It will change all settings back to factory defaults. The factory default username is **admin**, and there is no password.

## 2. If I forgot my password how can I access the web-based configuration?

You must perform a factory reset to set the router back to the default settings. Please refer to FAQ number 1 above.

## 3. How do I change the administrative password on my router?

**Step 1** Open a web browser and enter the IP address of the router in the address bar (default is 192.168.0.1). Click **Enter**.

**Step 2** The username is admin and by default there is not a password.

**Step 3** Click the **Tools** tab and then click **Admin** on the left side.

**Step 4** Enter a new password in the Admin Password section.

**Step 5** Click **Save Settings**.

#### 4. Why can't I access the web-based configuration for my router?

When entering the IP address of the D-Link device (192.168.0.1 for example), you are not connecting to a website on the Internet or have to be connected to the Internet. The device has the utility built-in to the router. Your computer must be on the same IP subnet to connect to the web-based utility.

Make sure you have Java enabled and are using an updated web browser. We recommend the following:

- Internet Explorer 6 or higher
- Netscape 8 or higher
- Opera 9.0 or higher
- Safari 2.0 or higher (with Java 1.4.1 or higher)
- Firefox 1.5 or higher
- Chrome 1.0 or higher

**Step 1** Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable or connect to a different port on the device if possible. If the computer is turned off, the link light may not be on.

**Step 2** Disable any internet security software running on the computer. Software firewalls such as Zone Alarm, Black Ice, Sygate, Norton Personal Firewall, and Windows Firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on disabling or configuring it.

**Step 3** Configure your Internet settings. Go to **Start > Settings > Control Panel**. Double-click the **Internet Options** icon. From the **Security** tab, click the button to restore the settings to their defaults.

Click the **Connection** tab and set the dial-up option to **Never Dial a Connection**. Click the **LAN Settings** button. Make sure all boxes are NOT checked. Click **OK**.

Click the **Advanced** tab and then click the button to restore these settings to their defaults. Click **OK** out to the desktop and close any open windows.

**Step 4** Check your IP address. Your computer must have an IP address in the same range of the device you are attempting to configure. By default the router uses the 192.168.0.xxx IP range.

To check the IP address, click on **Start > Run**. In the box type *CMD* and click **OK**. At the prompt, type in *ipconfig* and press **Enter**. The IP address, subnet mask, and default gateway addresses will be displayed. Make sure you take note of your computer's default gateway IP address. The default gateway is the IP address of the router. By default, it should be 192.168.0.1.

**Step 5** Access the web management. Open your web browser and enter the IP address of your D-Link router in the address bar. This should open the login page for your the web management.

# Wireless Basics

D-Link wireless products are based on industry standards to provide easy-to-use and compatible high-speed wireless connectivity within your home, business or public access wireless networks. Strictly adhering to the IEEE standard, the D-Link wireless family of products will allow you to securely access the data you want, when and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of wires. Wireless LANs are used increasingly in both home and office environments, and public areas such as airports, coffee shops and universities. Innovative ways to utilize WLAN technology are helping people to work and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers or an Internet connection supplied through the wired LAN. A Wireless Router is a device used to provide this link.



## **What is Wireless?**

Wireless or Wi-Fi technology is another way of connecting your computer to the network without using wires. Wi-Fi uses radio frequency to connect wirelessly, so you have the freedom to connect computers anywhere in your home or office network.

## **Why D-Link Wireless?**

D-Link is the worldwide leader and award winning designer, developer, and manufacturer of networking products. D-Link delivers the performance you need at a price you can afford. D-Link has all the products you need to build your network.

## **How does wireless work?**

Wireless works similar to how cordless phone work, through radio signals to transmit data from one point A to point B. But wireless technology has restrictions as to how you can access the network. You must be within the wireless network range area to be able to connect your computer. There are two different types of wireless networks Wireless Local Area Network (WLAN), and Wireless Personal Area Network (WPAN).

## **Wireless Local Area Network (WLAN)**

In a wireless local area network, a device called an Access Point (AP) connects computers to the network. The access point has a small antenna attached to it, which allows it to transmit data back and forth over radio signals. With an indoor access point as seen in the picture, the signal can travel up to 300 feet. With an outdoor access point the signal can reach out up to 30 miles to serve places like manufacturing plants, industrial locations, college and high school campuses, airports, golf courses, and many other outdoor venues.

## **Wireless Personal Area Network (WPAN)**

Bluetooth is the industry standard wireless technology used for WPAN. Bluetooth devices in WPAN operate in a range up to 30 feet away.

Compared to WLAN the speed and wireless operation range are both less than WLAN, but in return it doesn't use nearly as much power which makes it ideal for personal devices, such as mobile phones, PDAs, headphones, laptops, speakers, and other devices that operate on batteries.

## **Who uses wireless?**

Wireless technology has become so popular in recent years that almost everyone is using it, whether it's for home, office, business, D-Link has a wireless solution for it.

### **Home**

- Gives everyone at home broadband access
- Surf the web, check email, instant message, and etc
- Gets rid of the cables around the house
- Simple and easy to use

### **Small Office and Home Office**

- Stay on top of everything at home as you would at office
- Remotely access your office network from home
- Share Internet connection and printer with multiple computers
- No need to dedicate office space

## **Where is wireless used?**

Wireless technology is expanding everywhere not just at home or office. People like the freedom of mobility and it's becoming so popular that more and more public facilities now provide wireless access to attract people. The wireless connection in public places is usually called "hotspots".

Using a D-Link Cardbus Adapter with your laptop, you can access the hotspot to connect to Internet from remote locations like: Airports, Hotels, Coffee Shops, Libraries, Restaurants, and Convention Centers.

Wireless network is easy to setup, but if you're installing it for the first time it could be quite a task not knowing where to start. That's why we've put together a few setup steps and tips to help you through the process of setting up a wireless network.

## **Tips**

Here are a few things to keep in mind, when you install a wireless network.

### **Centralize your router or Access Point**

Make sure you place the router/access point in a centralized location within your network for the best performance. Try to place the router/access point as high as possible in the room, so the signal gets dispersed throughout your home. If you have a two-story home, you may need a repeater to boost the signal to extend the range.

### **Eliminate Interference**

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the router/access point. This would significantly reduce any interference that the appliances might cause since they operate on same frequency.

## Security

Don't let your next-door neighbors or intruders connect to your wireless network. Secure your wireless network by turning on the WPA or WEP security feature on the router. Refer to product manual for detail information on how to set it up.

# Wireless Modes

There are basically two modes of networking:

- **Infrastructure** – All wireless clients will connect to an access point or wireless router.
- **Ad-Hoc** – Directly connecting to another computer, for peer-to-peer communication, using wireless network adapters on each computer, such as two or more wireless network Cardbus adapters.

An Infrastructure network contains an Access Point or wireless router. All the wireless devices, or clients, will connect to the wireless router or access point.

An Ad-Hoc network contains only clients, such as laptops with wireless cardbus adapters. All the adapters must be in Ad-Hoc mode to communicate.

# Networking Basics

## Check your IP address

After you install your new D-Link adapter, by default, the TCP/IP settings should be set to obtain an IP address from a DHCP server (i.e. wireless router) automatically. To verify your IP address, please follow the steps below.


Click on **Start > Run**. In the run box type **cmd** and click **OK**. (Windows Vista® users type **cmd** in the **Start Search** box.)

At the prompt, type **ipconfig** and press **Enter**.

This will display the IP address, subnet mask, and the default gateway of your adapter.

If the address is 0.0.0.0, check your adapter installation, security settings, and the settings on your router. Some firewall software programs may block a DHCP request on newly installed adapters.

If you are connecting to a wireless network at a hotspot (e.g. hotel, coffee shop, airport), please contact an employee or administrator to verify their wireless network settings.

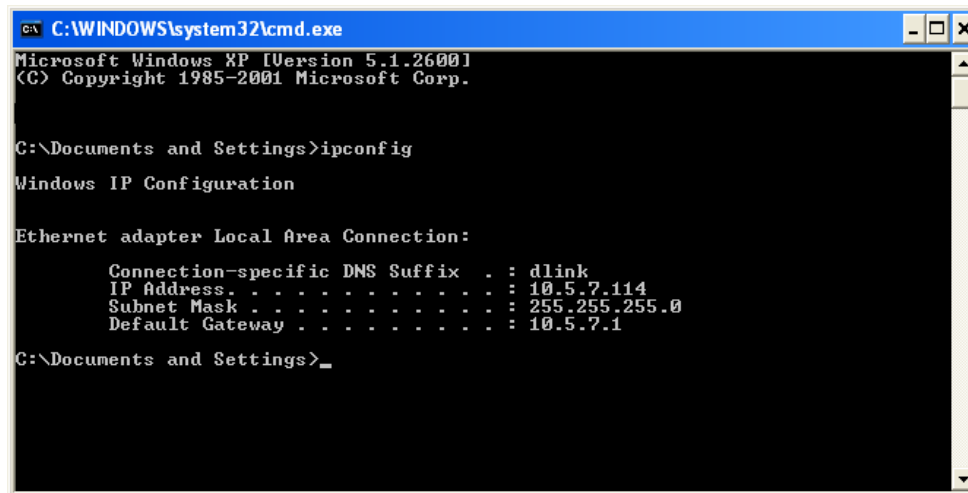

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix . : dlink
    IP Address . . . . . : 10.5.7.114
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.5.7.1

C:\Documents and Settings>_
```

## Statically Assign an IP address

If you are not using a DHCP capable gateway/router, or you need to assign a static IP address, please follow the steps below:

### Step 1

Windows Vista® - Click on **Start > Control Panel > Network and Internet > Network and Sharing Center > Manage Network Connections.**

Windows® XP - Click on **Start > Control Panel > Network Connections.**

Windows® 2000 - From the desktop, right-click **My Network Places > Properties.**

### Step 2

Right-click on the **Local Area Connection** which represents your D-Link network adapter and select **Properties.**

### Step 3

Highlight **Internet Protocol (TCP/IP)** and click **Properties.**

### Step 4


Click **Use the following IP address** and enter an IP address that is on the same subnet as your network or the LAN IP address on your router.

**Example:** If the router's LAN IP address is 192.168.0.1, make your IP address 192.168.0.X where X is a number between 2 and 99. Make sure that the number you choose is not in use on the network. Set Default Gateway the same as the LAN IP address of your router (192.168.0.1).

Set Primary DNS the same as the LAN IP address of your router (192.168.0.1). The Secondary DNS is not needed or you may enter a DNS server from your ISP.

### Step 5

Click **OK** twice to save your settings.

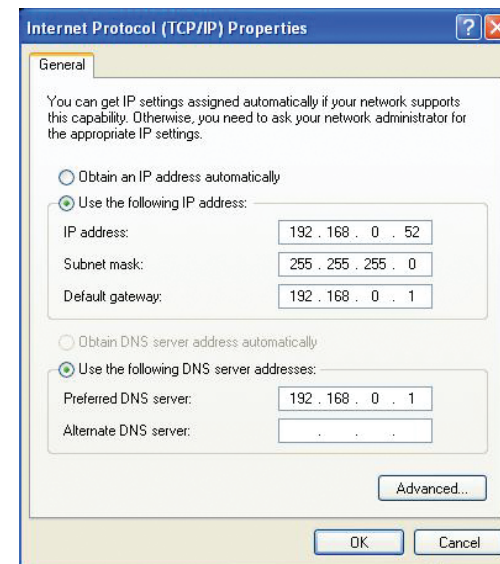

# Technical Specifications

## Standards

- IEEE 802.11g
- IEEE 802.11b
- IEEE 802.3
- IEEE 802.3u

## VPN Pass Through / Multi-Sessions

- PPTP
- L2TP
- IPSec

## Device Management

- Web-Based: Internet Explorer v6 or later; Mozilla Firefox v1.5 or later; or other Java-enabled browsers.

## Wireless Signal Rates\*

- 108Mbps
- 54Mbps
- 36Mbps
- 18Mbps
- 11Mbps
- 6Mbps
- 2Mbps
- 48Mbps
- 24Mbps
- 12Mbps
- 9Mbps
- 5.5Mbps
- 1Mbps

## Security

- WPA - Wi-Fi Protected Access (TKIP, MIC, IV Expansion, Shared Key Authentication)
- 802.1x
- 64/128-bit WEP

## Media Access Control

- CSMA/CA with ACK

## Frequency Range

- 2.4GHz to 2.462GHz

## Wireless Signal Range\*

- Indoors: Up to 328 feet (100 meters)
- Outdoors: Up to 1,312 feet (400 meters)

## Modulation Technology

- Orthogonal Frequency Division Multiplexing (OFDM)
- Complementary Code Keying (CCK)

## Receiver Sensitivity

- 54Mbps OFDM, 10% PER, -68dBm)
- 48Mbps OFDM, 10% PER, -68dBm)
- 36Mbps OFDM, 10% PER, -75dBm)
- 24Mbps OFDM, 10% PER, -79dBm)
- 18Mbps OFDM, 10% PER, -82dBm)
- 12Mbps OFDM, 10% PER, -84dBm)
- 11Mbps CCK, 8% PER, -82dBm)
- 9Mbps OFDM, 10% PER, -87dBm)
- 6Mbps OFDM, 10% PER, -88dBm)
- 5.5Mbps CCK, 8% PER, -85dBm)
- 2Mbps QPSK, 8% PER, -86dBm)
- 1Mbps BPSK, 8% PER, -89dBm)

## Transmitter Output Power

- 15dBm  $\pm$  2dB



**External Antenna Type**

- Single detachable reverse SMA

**LEDs**

- Power
- WLAN
- WAN
- LAN (10/100)

**Operating Temperature**

- 32°F to 131°F ( 0°C to 55°C)

**Humidity**

- 95% maximum (non-condensing)

**Power Input**

- Ext. Power Supply DC 5V, 2.5A

**Safety & Emissions**

- FCC

**Dimensions**

- L = 5.72 inches (145mm)
- W = 4.60 inches (116.84mm)
- H = 1.38 inches (35mm)

**Weight**

- ~10.3 Ounces

**Warranty**

- 1 Year Limited

\* Maximum wireless signal rate derived from IEEE Standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

# Contacting Technical Support

U.S. and Canadian customers can contact D-Link technical support through our web site or by phone.

Before you contact technical support, please have the following ready:

- Model number of the product (e.g. WBR-2310)
- Hardware Revision (located on the label on the bottom of the router (e.g. rev B1))
- Serial Number (s/n number located on the label on the bottom of the router).

You can find software updates and user documentation on the D-Link website as well as frequently asked questions and answers to technical issues.

## For customers within the United States:

**Phone Support:**  
(877) 453-5465

**Internet Support:**  
<http://support.dlink.com>

## For customers within Canada:

**Phone Support:**  
(800) 361-5265

**Internet Support:**  
<http://support.dlink.com>

# Warranty

Subject to the terms and conditions set forth herein, D-Link Systems, Inc. (“D-Link”) provides this Limited Warranty:

- Only to the person or entity that originally purchased the product from D-Link or its authorized reseller or distributor, and
- Only for products purchased and delivered within the fifty states of the United States, the District of Columbia, U.S. Possessions or Protectorates, U.S. Military Installations, or addresses with an APO or FPO.

## **Limited Warranty:**

D-Link warrants that the hardware portion of the D-Link product described below (“Hardware”) will be free from material defects in workmanship and materials under normal use from the date of original retail purchase of the product, for the period set forth below (“Warranty Period”), except as otherwise stated herein.

- Hardware (excluding power supplies and fans): One (1) year
- Power supplies and fans: One (1) year
- Spare parts and spare kits: Ninety (90) days

The customer’s sole and exclusive remedy and the entire liability of D-Link and its suppliers under this Limited Warranty will be, at D-Link’s option, to repair or replace the defective Hardware during the Warranty Period at no charge to the original owner or to refund the actual purchase price paid. Any repair or replacement will be rendered by D-Link at an Authorized D-Link Service Office. The replacement hardware need not be new or have an identical make, model or part. D-Link may, at its option, replace the defective Hardware or any part thereof with any reconditioned product that D-Link reasonably determines is substantially equivalent (or superior) in all material respects to the defective Hardware. Repaired or replacement hardware will be warranted for the remainder of the original Warranty Period or ninety (90) days, whichever is longer, and is subject to the same limitations and exclusions. If a material defect is incapable of correction, or if D-Link determines that it is not practical to repair or replace the defective Hardware, the actual price paid by the original purchaser for the defective Hardware will be refunded by D-Link upon return to D-Link of the defective Hardware. All Hardware or part thereof that is replaced by D-Link, or for which the purchase price is refunded, shall become the property of D-Link upon replacement or refund.

### **Limited Software Warranty:**

D-Link warrants that the software portion of the product (“Software”) will substantially conform to D-Link’s then current functional specifications for the Software, as set forth in the applicable documentation, from the date of original retail purchase of the Software for a period of ninety (90) days (“Software Warranty Period”), provided that the Software is properly installed on approved hardware and operated as contemplated in its documentation. D-Link further warrants that, during the Software Warranty Period, the magnetic media on which D-Link delivers the Software will be free of physical defects. The customer’s sole and exclusive remedy and the entire liability of D-Link and its suppliers under this Limited Warranty will be, at D-Link’s option, to replace the non-conforming Software (or defective media) with software that substantially conforms to D-Link’s functional specifications for the Software or to refund the portion of the actual purchase price paid that is attributable to the Software. Except as otherwise agreed by DLink in writing, the replacement Software is provided only to the original licensee, and is subject to the terms and conditions of the license granted by D-Link for the Software. Replacement Software will be warranted for the remainder of the original Warranty Period and is subject to the same limitations and exclusions. If a material non-conformance is incapable of correction, or if D-Link determines in its sole discretion that it is not practical to replace the non-conforming Software, the price paid by the original licensee for the non-conforming Software will be refunded by D-Link; provided that the non-conforming Software (and all copies thereof) is first returned to D-Link. The license granted respecting any Software for which a refund is given automatically terminates.

### **Non-Applicability of Warranty:**

The Limited Warranty provided hereunder for Hardware and Software portions of D-Link’s products will not be applied to and does not cover any refurbished product and any product purchased through the inventory clearance or liquidation sale or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product and in that case, the product is being sold “As-Is” without any warranty whatsoever including, without limitation, the Limited Warranty as described herein, notwithstanding anything stated herein to the contrary.

### **Submitting A Claim:**

The customer shall return the product to the original purchase point based on its return policy. In case the return policy period has expired and the product is within warranty, the customer shall submit a claim to D-Link as outlined below:

- The customer must submit with the product as part of the claim a written description of the Hardware defect or Software nonconformance in sufficient detail to allow DLink to confirm the same, along with proof of purchase of the product (such as a copy of the dated purchase invoice for the product) if the product is not registered.
- The customer must obtain a Case ID Number from D-Link Technical Support at 1-877-453-5465, who will attempt to assist the customer in resolving any suspected defects with the product. If the product is considered defective, the customer must obtain a Return Material Authorization (“RMA”) number by completing the RMA form and entering the assigned Case ID Number at <https://rma.dlink.com/>.

- After an RMA number is issued, the defective product must be packaged securely in the original or other suitable shipping package to ensure that it will not be damaged in transit, and the RMA number must be prominently marked on the outside of the package. Do not include any manuals or accessories in the shipping package. DLink will only replace the defective portion of the product and will not ship back any accessories.
- The customer is responsible for all in-bound shipping charges to D-Link. No Cash on Delivery (“COD”) is allowed. Products sent COD will either be rejected by D-Link or become the property of D-Link. Products shall be fully insured by the customer and shipped to D-Link Systems, Inc., 17595 Mt. Herrmann, Fountain Valley, CA 92708. D-Link will not be held responsible for any packages that are lost in transit to D-Link. The repaired or replaced packages will be shipped to the customer via UPS Ground or any common carrier selected by D-Link. Return shipping charges shall be prepaid by D-Link if you use an address in the United States, otherwise we will ship the product to you freight collect. Expedited shipping is available upon request and provided shipping charges are prepaid by the customer. D-Link may reject or return any product that is not packaged and shipped in strict compliance with the foregoing requirements, or for which an RMA number is not visible from the outside of the package. The product owner agrees to pay D-Link’s reasonable handling and return shipping charges for any product that is not packaged and shipped in accordance with the foregoing requirements, or that is determined by D-Link not to be defective or non-conforming.

### **What Is Not Covered:**

The Limited Warranty provided herein by D-Link does not cover:

Products that, in D-Link’s judgment, have been subjected to abuse, accident, alteration, modification, tampering, negligence, misuse, faulty installation, lack of reasonable care, repair or service in any way that is not contemplated in the documentation for the product, or if the model or serial number has been altered, tampered with, defaced or removed; Initial installation, installation and removal of the product for repair, and shipping costs; Operational adjustments covered in the operating manual for the product, and normal maintenance; Damage that occurs in shipment, due to act of God, failures due to power surge, and cosmetic damage; Any hardware, software, firmware or other products or services provided by anyone other than D-Link; and Products that have been purchased from inventory clearance or liquidation sales or other sales in which D-Link, the sellers, or the liquidators expressly disclaim their warranty obligation pertaining to the product.

While necessary maintenance or repairs on your Product can be performed by any company, we recommend that you use only an Authorized D-Link Service Office. Improper or incorrectly performed maintenance or repair voids this Limited Warranty.

### **Disclaimer of Other Warranties:**

EXCEPT FOR THE LIMITED WARRANTY SPECIFIED HEREIN, THE PRODUCT IS PROVIDED “AS-IS” WITHOUT ANY WARRANTY OF ANY KIND WHATSOEVER INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT.

IF ANY IMPLIED WARRANTY CANNOT BE DISCLAIMED IN ANY TERRITORY WHERE A PRODUCT IS SOLD, THE DURATION OF SUCH IMPLIED WARRANTY SHALL BE LIMITED TO THE DURATION OF THE APPLICABLE WARRANTY PERIOD SET FORTH ABOVE. EXCEPT AS EXPRESSLY COVERED UNDER THE LIMITED WARRANTY PROVIDED HEREIN, THE ENTIRE RISK AS TO THE QUALITY, SELECTION AND PERFORMANCE OF THE PRODUCT IS WITH THE PURCHASER OF THE PRODUCT.

**Limitation of Liability:**

TO THE MAXIMUM EXTENT PERMITTED BY LAW, D-LINK IS NOT LIABLE UNDER ANY CONTRACT, NEGLIGENCE, STRICT LIABILITY OR OTHER LEGAL OR EQUITABLE THEORY FOR ANY LOSS OF USE OF THE PRODUCT, INCONVENIENCE OR DAMAGES OF ANY CHARACTER, WHETHER DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL (INCLUDING, BUT NOT LIMITED TO, DAMAGES FOR LOSS OF GOODWILL, LOSS OF REVENUE OR PROFIT, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, FAILURE OF OTHER EQUIPMENT OR COMPUTER PROGRAMS TO WHICH D-LINK'S PRODUCT IS CONNECTED WITH, LOSS OF INFORMATION OR DATA CONTAINED IN, STORED ON, OR INTEGRATED WITH ANY PRODUCT RETURNED TO D-LINK FOR WARRANTY SERVICE) RESULTING FROM THE USE OF THE PRODUCT, RELATING TO WARRANTY SERVICE, OR ARISING OUT OF ANY BREACH OF THIS LIMITED WARRANTY, EVEN IF D-LINK HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE SOLE REMEDY FOR A BREACH OF THE FOREGOING LIMITED WARRANTY IS REPAIR, REPLACEMENT OR REFUND OF THE DEFECTIVE OR NONCONFORMING PRODUCT. THE MAXIMUM LIABILITY OF D-LINK UNDER THIS WARRANTY IS LIMITED TO THE PURCHASE PRICE OF THE PRODUCT COVERED BY THE WARRANTY. THE FOREGOING EXPRESS WRITTEN WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ANY OTHER WARRANTIES OR REMEDIES, EXPRESS, IMPLIED OR STATUTORY.

**Governing Law:**

This Limited Warranty shall be governed by the laws of the State of California. Some states do not allow exclusion or limitation of incidental or consequential damages, or limitations on how long an implied warranty lasts, so the foregoing limitations and exclusions may not apply. This Limited Warranty provides specific legal rights and you may also have other rights which vary from state to state.

**Trademarks:**

D-Link is a registered trademark of D-Link Systems, Inc. Other trademarks or registered trademarks are the property of their respective owners.

**Copyright Statement:**

No part of this publication or documentation accompanying this product may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from D-Link Corporation/D-Link Systems, Inc., as stipulated by the United States Copyright Act of 1976 and any amendments thereto. Contents are subject to change without prior notice.

Copyright ©2009 by D-Link Corporation/D-Link Systems, Inc. All rights reserved.

**CE Mark Warning:**

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

**FCC Statement:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

For detailed warranty information applicable to products purchased outside the United States, please contact the corresponding local D-Link office.



# Registration



Product registration is entirely voluntary and failure to complete or return this form will not diminish your warranty rights.

Version 2.2  
February 23, 2009